


WAAS CH 81817 W21A	APP CRS 218°	Rwy Ldg TDZE 1906 Apt Elev 1919
--	------------------------	---

RNAV (GPS) RWY 21
SAN ANGELO RGNL/MATHIS FLD (SJT)

RNP APCH - GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Circling NA for Cat E west of Rwy 18-36. ASR		MISSED APPROACH: Climb to 4400 direct HEXPE and hold.		
ATIS 128.45 319.0	SAN ANGELO APP CON ★ 125.35 354.1	MATHIS TOWER ★ 118.3 (CTAF) 0 284.7	GND CON 121.9 348.6	UNICOM 122.95

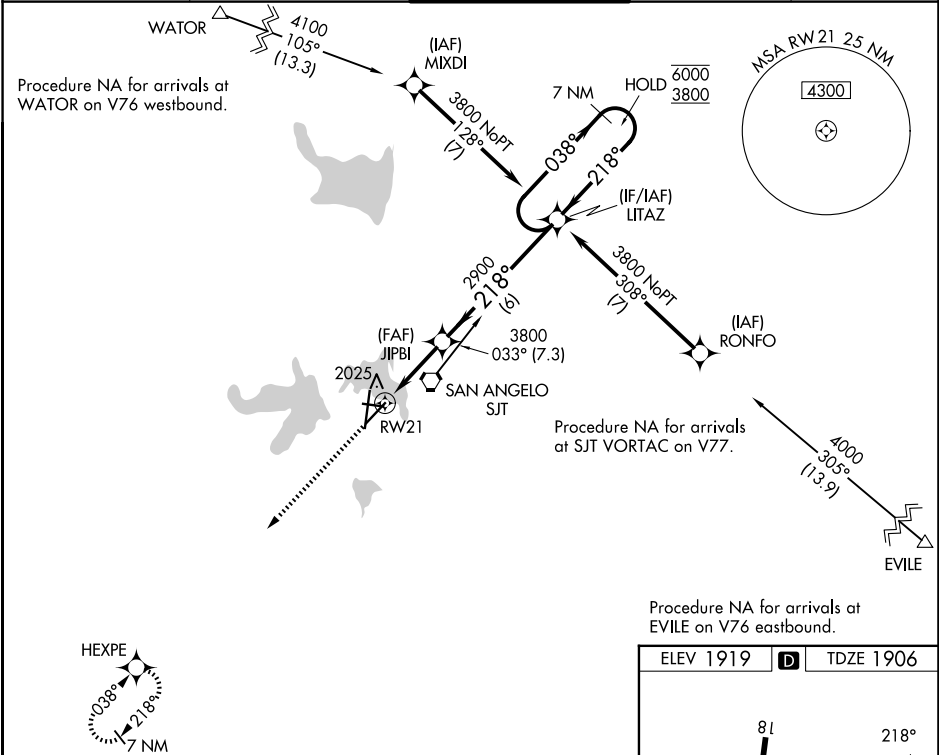

4400 ↑ HEXPE		LITAZ 7 NM Holding Pattern				
RW21 1.2 NM to RW21		JIPBI 2900	218°	038°	6000 3800	GP 3.00° TCH 52
1.2 NM		1.8 NM	6 NM			
CATEGORY	A	B	C	D	E	
LPV DA	2106-1		200 (200-1)			
LNAV/VNAV DA	2250-1		344 (400-1)			
LNAV MDA	2340-1	434 (500-1)	2340-1¼ 434 (500-1¼)			
CIRCLING	2360-1 441 (500-1)	2380-1 461 (500-1)	2500-1½ 581 (600-1½)	2700-2½ 781 (800-2½)	2700-2¾ 781 (800-2¾)	

