


APP CRS	Rwy Ldg	8502
128°	TDZE	809
	Apt Elev	809


RNAV (RNP) Z RWY 13R
SAN ANTONIO INTL (SAT)

RNP AR APCH - GPS.	ALSIF-2	MISSED APPROACH: (Do not exceed 210K until POYIG) Climb to 3100 on track 128° to POYIG and track 171° to EMBOW and hold.
For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C. For inop ALS, increase RNP 0.3 all Cats visibility to RVR 6000.		

D-ATIS 118.9	SAN ANTONIO APP CON 125.1 307.0	SAN ANTONIO TOWER 119.8 257.8	GND CON 121.9 348.6
-----------------	------------------------------------	----------------------------------	------------------------

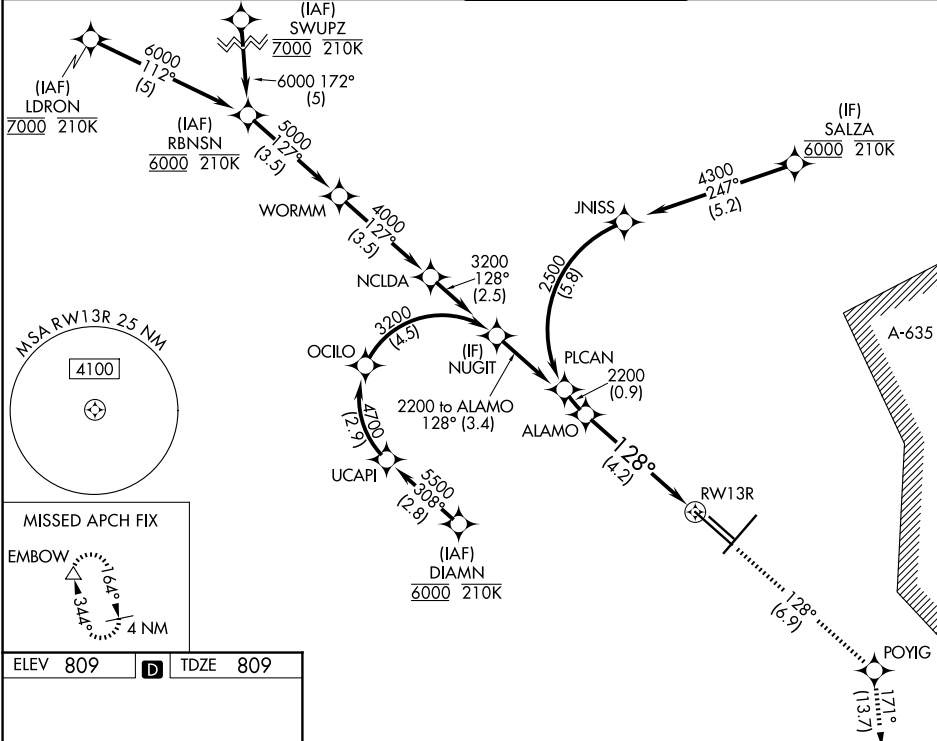

ELEV 809	D	TDZE 809
----------	---	----------



TDZL/RCLS Rwy 13R
REIL Rwy 13L, 22 and 31R
HIRL Rwy 4-22 and 13R-31L
MIRL Rwy 13L-31R

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).				3100 ↑ tr 128°		POYIG ✦ tr 171°		EMBOW △	
				See planview for multiple IF locations.					
ALAMO 2200 2200 GP 3.00° TCH 58 4.2 NM RW13R									
CATEGORY		A		B		C		D	
RNP 0.15 DA				1137/26		328 (400-½)			
RNP 0.30 DA				1218/40		409 (500-¾)			
AUTHORIZATION REQUIRED									

AUTHORIZATION REQUIRED