

APP CRS	Rwy Ldg	8505
217°	TDZE	770
	Apt Elev	809



RNAV (RNP) Z RWY 22
SAN ANTONIO INTL (SAT)

RNP AR APCH - GPS. Authorization required.
From BRSQT: min RNP 0.50. From NADDE: RF.


MISSED APPROACH: Climb to 3100
direct IMIKE and on track 137° to
EMBOW and hold.

For uncompensated Baro-VNAV systems, procedure NA below -6°C or above 54°C.

D-ATIS 118.9	SAN ANTONIO APP CON 125.1 307.0	SAN ANTONIO TOWER 119.8 257.8	GND CON 121.9 348.6
-----------------	------------------------------------	----------------------------------	------------------------

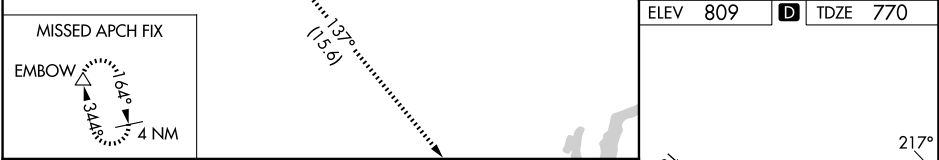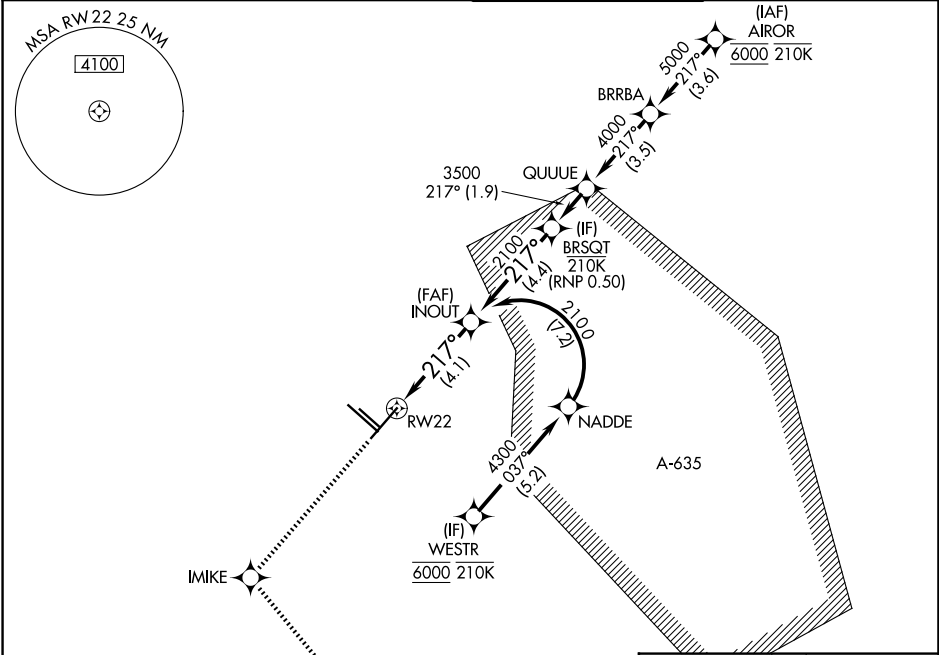

3100	IMIKE	EMBOW	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 85).
↑	✱	tr 137°	

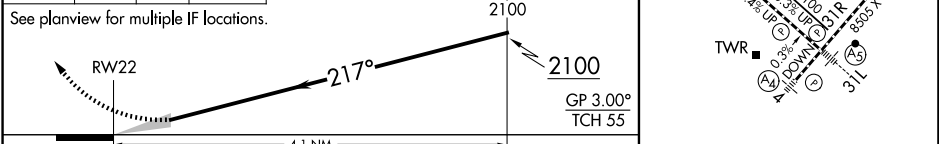

CATEGORY	A	B	C	D
RNP 0.15 DA		1070-7/8	300 (300-7/8)	
RNP 0.30 DA		1220-13/8	450 (500-13/8)	

AUTHORIZATION REQUIRED

TDZL/RCLS Rwy 13R
REIL Rwys 13L, 22 and 31R
HIRL Rwys 4-22 and 13R-31L
MIRL Rwy 13L-31R

SC-3, 22 JAN 2026 to 19 FEB 2026

SC-3, 22 JAN 2026 to 19 FEB 2026