

HI-ILS or LOC/DME Z RWY 16

LOC I-SKF 110.1	APCH CRS 158°	Rwy Idg 11,550 TDZE 690 Arpt Elev 690
---------------------------	-------------------------	--

[USAF]


KELLY FLD (KSKF)

▼ *When ALS inop, increase RVR to 40 and vis to ¾ mile.
 **When ALS inop, increase RVR to 60 and vis to 1½ miles.
 ***Circling not authorized E of Rwy 16-34.


ALSF-1

MISSED APPROACH: Climb to 2500 via KSY R-163 until 4 DME, then continue climb to 3000 to FITER/15 DME and hold.

ATIS 120.45 273.5	SAN ANTONIO APP CON 118.05 353.5	KELLY TOWER 124.3 322.35	GND CON 121.8 289.4
-----------------------------	--	------------------------------------	-------------------------------

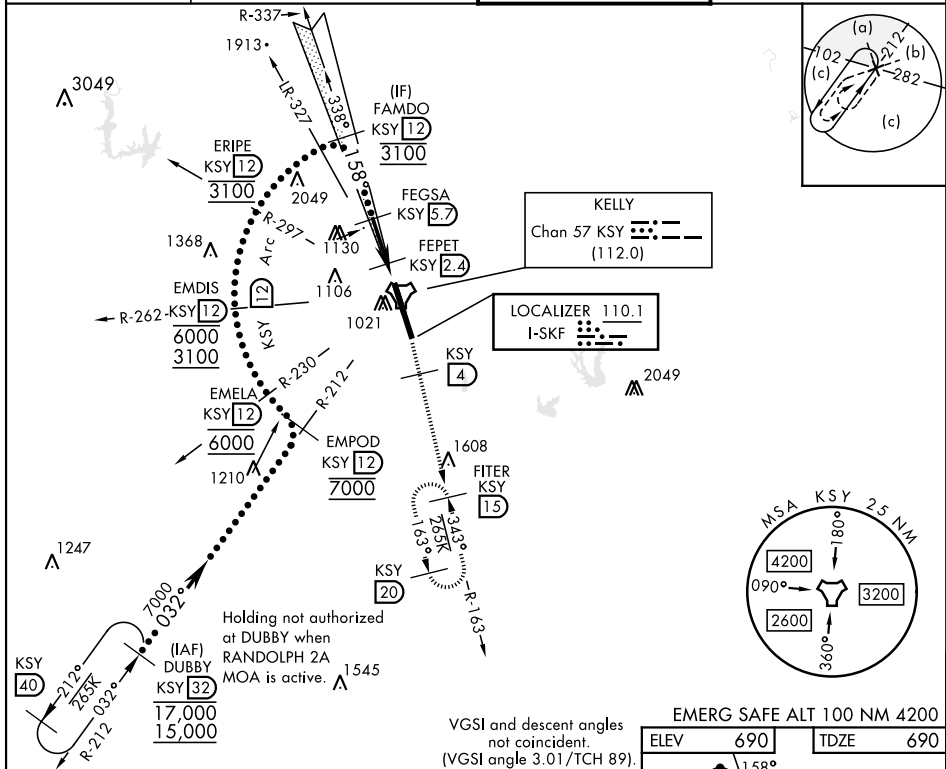

GS 3.00° TCH 57	FAMDO Intcp LCZR R-337 KSY 12 3100	FEGSA KSY 5.7 2400	FEPET KSY 2.4 1360	KSY TACAN
2500 KSY R-163	3000 FITER 15	2500 KSY 4	3000 FITER 15	2500 KSY 4
3.3 NM	1.4 NM	0.5 NM	0.5 NM	0.5 NM
CATEGORY	C	D	E	E
S-ILS 16 *	890/24	200	(200-½)	(200-½)
S-LOC/ ** DME 16	1080/35	390	(400-¾)	(400-¾)
*** CIRCLING	1340-1¾ 650 (700-1¾)	1900-3	1210	(1300-3)

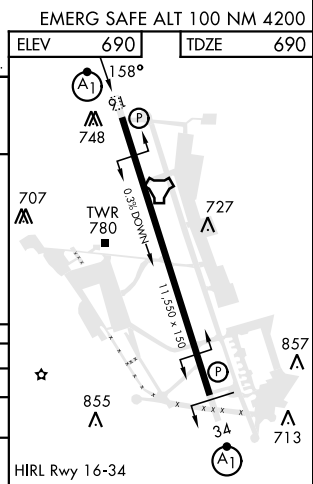

HI-ILS or LOC/DME Z RWY 16