

## TJANO TWO DEPARTURE (RNAV)

STINSON MUNI (SSF)  
SAN ANTONIO, TEXAS

SAN ANTONIO DEP CON 125.7 290.225 ATIS 128.8 CLNC DEL (When twr closed) 121.7 GND CON 121.7 379.9 STINSON TOWER ★ 118.2 379.9	RNAV 1 - DME/DME IRU or GPS. RADAR required for non-GPS equipped aircraft. RADAR required.	TOP ALTITUDE: ASSIGNED BY ATC
--	--	----------------------------------


TAKEOFF MINIMUMS

Rwy 10: Standard with minimum climb of 230'/NM to 1900.

Rwy 14: Standard with minimum climb of 220'/NM to 1900.

Rwy 28: 300-1 $\frac{1}{8}$  or standard with minimum climb of 230'/NM to 900, or alternatively, with standard takeoff minimums and a normal 200'/NM climb gradient, takeoff must occur no later than 1800' prior to DER.

Rwy 32: Standard with minimum climb of 230'/NM to 1700.

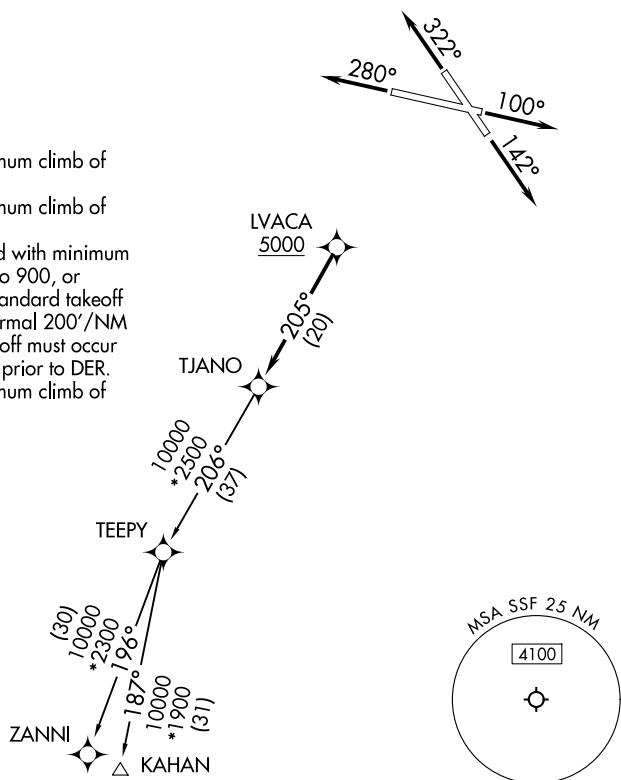

NOTE: Chart not to scale.



## DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 10: Climb on heading 100° or as assigned by ATC, for vectors to LVACA, thence. . .

TAKEOFF RUNWAY 14: Climb on heading 142° or as assigned by ATC, for vectors to LVACA, thence. . .

TAKEOFF RUNWAY 28: Climb on heading 280° or as assigned by ATC, for vectors to LVACA, thence. . .

TAKEOFF RUNWAY 32: Climb on heading 322° or as assigned by ATC, for vectors to LVACA, thence. . .

. . . on track 205° to TJANO, then on transition. Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

KAHAN TRANSITION (TJANO2.KAHAN)

ZANNI TRANSITION (TJANO2.ZANNI)