


WAAS CH 49237 W09A	APP CRS 095°	Rwy Ldg 7280 TDZE 17 Apt Elev 17
--	------------------------	---

RNAV (GPS) RWY 9
SAN DIEGO INTL (SAN)

RNP APCH. ▼ ▲ Circling NA north of Rwy 9-27. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 6°C or above 47°C. When Circling to Rwy 27 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. Rwy 9 helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV Cats A/B visibility to RVR 5500.	MALS R ▲ MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct CAPUS and hold.
--	---

D-ATIS 134.8	SOCAL APP CON 119.6 363.1 (W) 124.35 279.625 (E)	LINDBERGH TOWER 118.3 338.225	GND CON 123.9
------------------------	--	---	-------------------------

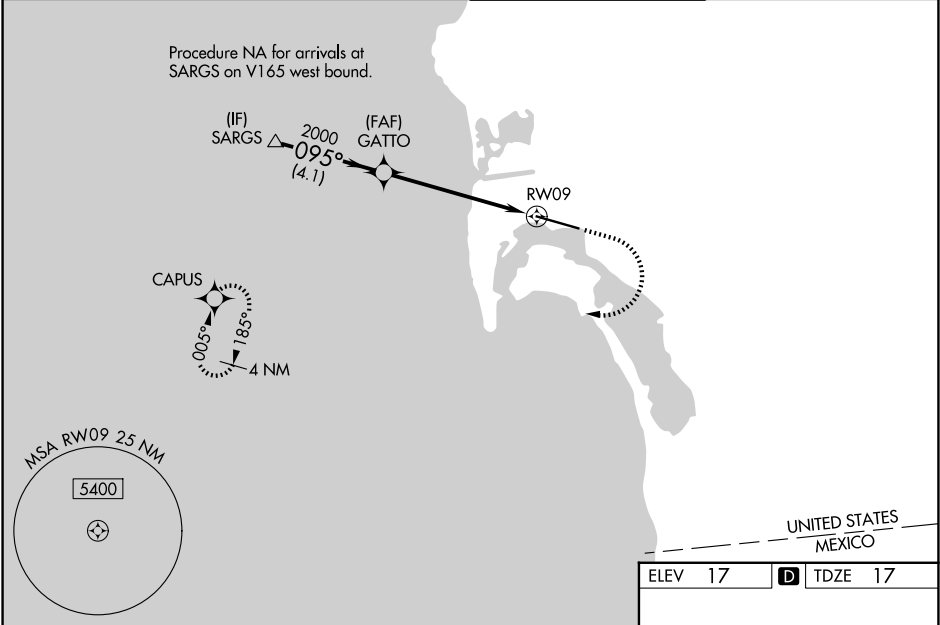

VGSI and RNAV glidepath not coincident (VGSI Angle 3.30/TCH 76).					2000 ↑ 3000 ↗ CAPUS ✦	
SARGs 2100 095° GATTO 2000 2000 *1.6 NM to RW09 RW09 *LNAV only. 4.1 NM 4.3 NM 1.6 NM					095° TWR 9401 X 200 A5 A4	
CATEGORY	A		B	C	D	
LPV DA	262/40		245 (300-¾)			
LNAV/ VNAV DA	621-1½		604 (700-1½)			
LNAV MDA	600/40 583 (600-¾)		600-1¼ 583 (600-1¼)			
CIRCLING	800-1 783 (800-1)	820-1 803 (900-1)	820-2¼ 803 (900-2¼)	940-3 923 (1000-3)	TDZL/RCLS Rwy 9 and 27 HIRL Rwy 9-27	

SW-3, 22 JAN 2026 to 19 FEB 2026

SW-3, 22 JAN 2026 to 19 FEB 2026