

WAAS CH 53533 W19B	APP CRS 194°	Rwy Ldg 7650 TDZE 11 Apt Elev 13	RNAV (GPS) Y RWY 19R SAN FRANCISCO INTL (SFO)
--	------------------------	---	---

RNP APCH-GPS.



▼

⚠

LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. Simultaneous approach authorized. Simultaneous operations require use of vertical guidance; maintain last assigned altitude until established on glidepath. Simultaneous approach NA below 12°C (52°F).

MISSED APPROACH: Climb to 1540 then climbing right turn to 3000 direct THHEO and hold.

D-ATIS 113.7 115.8 118.85	NORCAL APP CON 134.5 338.2	SAN FRANCISCO TOWER 120.5 269.1	GND CON 121.8	CLNC DEL 118.2	CPDLC
---	--------------------------------------	---	-------------------------	--------------------------	-------

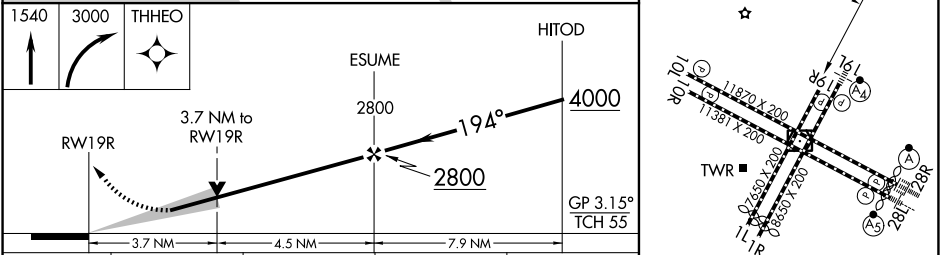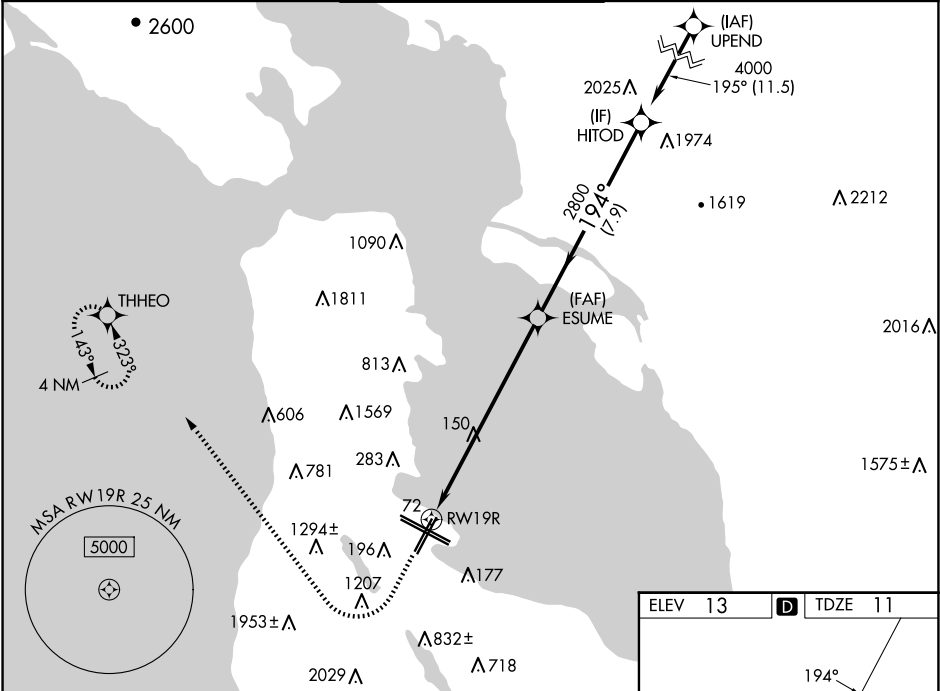

CATEGORY	A	B	C	D
LPV DA	1005-4	994 (1000-4)		
LNAV/VNAV DA	878-2½	867 (900-2½)		
LNAV MDA	1320-1¼ 1309 (1400-1¼)	1320-1½ 1309 (1400-1½)	1320-3	1309 (1400-3)

TDZ/CL Rwy 19L and 28R

REIL Rwy 1L, 1R and 10L

HIRL all Rwy