



WAAS CH 57945 W19D	APP CRS 194°	Rwy Ldg 7650 TDZE 11 Apt Elev 13
--	------------------------	---

RNAV (GPS) Z RWY 19R
SAN FRANCISCO INTL (SFO)

RNP APCH - GPS. Simultaneous approach authorized. Simultaneous operations require use of vertical guidance; maintain last assigned altitude until established on glidepath. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. Simultaneous approach NA below 12°C (52°F). Use of FD or AP required during simultaneous operations.	MISSED APPROACH: Climb to 600 then climbing right turn to 3000 direct THHEO and hold. *Missed approach requires minimum climb of 395 feet per NM to 2100; if unable to meet climb gradient, see RNAV (GPS) Y RWY 19R.
--	--

D-ATIS 113.7 115.8 118.85	NORCAL APP CON 134.5 338.2	SAN FRANCISCO TOWER 120.5 269.1	GND CON 121.8	CLNC DEL 118.2	CPDLC
---	--------------------------------------	---	-------------------------	--------------------------	-------

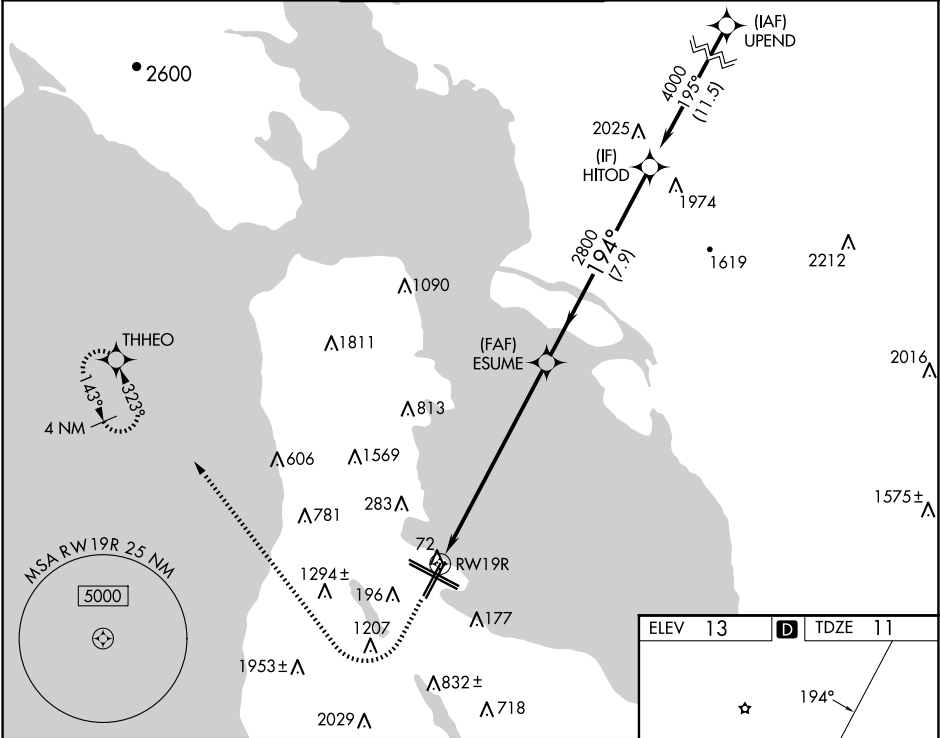

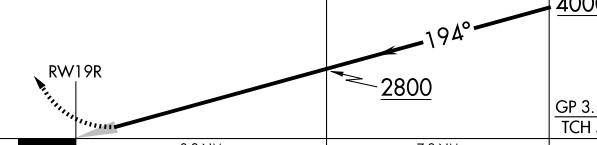600	3000	THHEO				
						
			HITOD 4000 GP 3.15° TCH 55			
8.2 NM			7.9 NM			
CATEGORY	A	B	C	D		
LPV	DA*	317/45		306 (400-7%)		
LNAV/VNAV	DA*	328/45		317 (400-7%)		



TDZ/CL Rwy 19L and 28R
 REIL Rwy 1L, 1R and 10L
 HIRL all Rwy