



WAAS CH 99502 W20A	APP CRS 196°	Rwy Ldg TDZE 54 Apt Elev 56
--	------------------------	---

RNAV (GPS) Y RWY 20R

JOHN WAYNE/ORANGE COUNTY (SNA)

RNP APCH - GPS. RADAR required.	MALSR 	MISSED APPROACH: Climb to 3000 direct MINOE.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C or above 54°C. Circling Rwy 20L NA at night. For inop ALS increase LNAV/VNAV visibility to 1 3⁄8 SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.		

D-ATIS 126.0	SOCAL APP CON 121.3 263.1	JOHN WAYNE TOWER ★ 126.8 (CTAF) 0 343.625	GND CON 120.8	UNICOM 122.95
------------------------	-------------------------------------	---	-------------------------	-------------------------

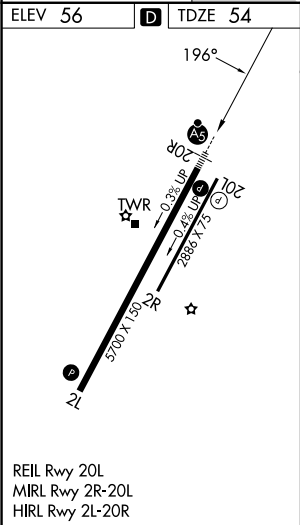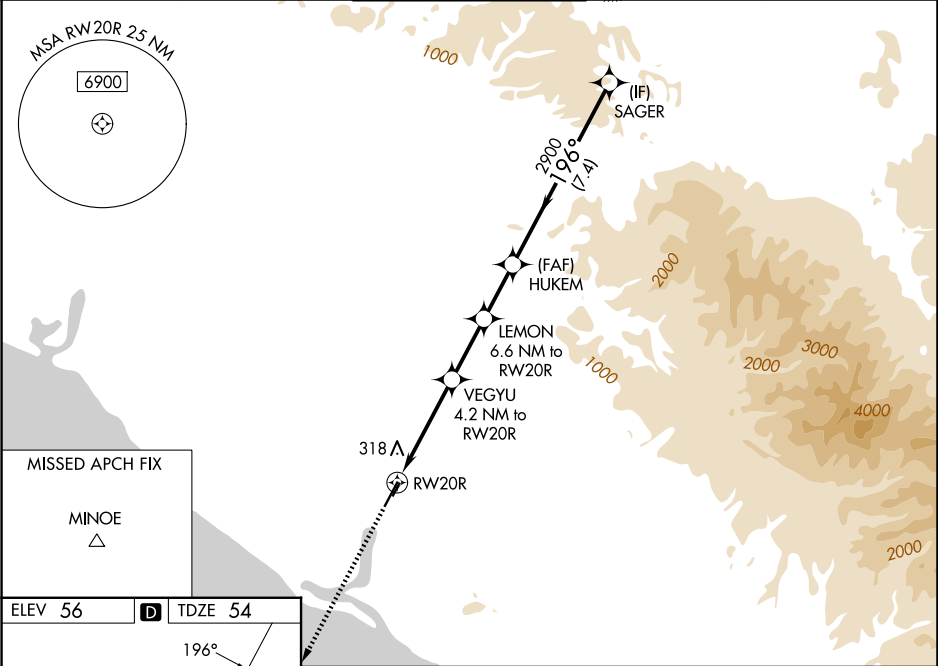

3000

↑

MINOE

△

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00°/TCH 68).

HUKEM

2900

SAGER

3500

VEGYU

4.2 NM to RW20R

LEMON

6.6 NM to RW20R

1.5 NM to RW20R

RW20R

1.5 NM

2.7 NM

2.5 NM

2.2 NM

7.4 NM

1420

2200

2900

196°

GP 3.00°
TCH 51

CATEGORY	A	B	C	D
LPV DA*	255/24		201 (200-½)	
LNAV/VNAV DA	516/50		462 (500-1)	
LNAV MDA	580/24	526 (600-½)	580/55 526 (600-1)	
CIRCLING	640-1 584 (600-1)		840-2¼ 784 (800-2¼)	1180-3 1124 (1200-3)