

ILS or LOC RWY 28

|               |          |              |
|---------------|----------|--------------|
| LOC/DME I-SVN | APCH CRS | Rwy Idg      |
| 109.5         | 276°     | 11,393       |
| Chan 32       |          | TDZE 41      |
|               |          | Arpt Elev 41 |


[USA]

HUNTER AAF (KSVN)

|                                                                                                                                                                                                                                      |        |                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|---------------------------------------------------------------------------------------------------------------------------------------|
| DME required                                                                                                                                                                                                                         | ALSF-1 | MISSED APPROACH: Climb to 1000, then climbing left turn to 2300 heading 050° and on SVN VOR/DME R-095 to ESPEY/ SVN 7.7 DME and hold. |
| ▼ * When ALS inop, increase RVR to 40, vis to ¾ mile.<br>** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1¼ miles.<br>*** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1½ miles. |        |                                                                                                                                       |

|                           |                                     |                                   |                            |
|---------------------------|-------------------------------------|-----------------------------------|----------------------------|
| ATIS ★<br>127.525 323.125 | SAVANNAH APP CON ★<br>120.4 353.775 | TOWER ★<br>124.975 (CTAF) 279.575 | GND CON ★<br>121.8 291.675 |
|---------------------------|-------------------------------------|-----------------------------------|----------------------------|

\*\*\*\* Circling not authorized for CAT CD N of Rwy 10-28.

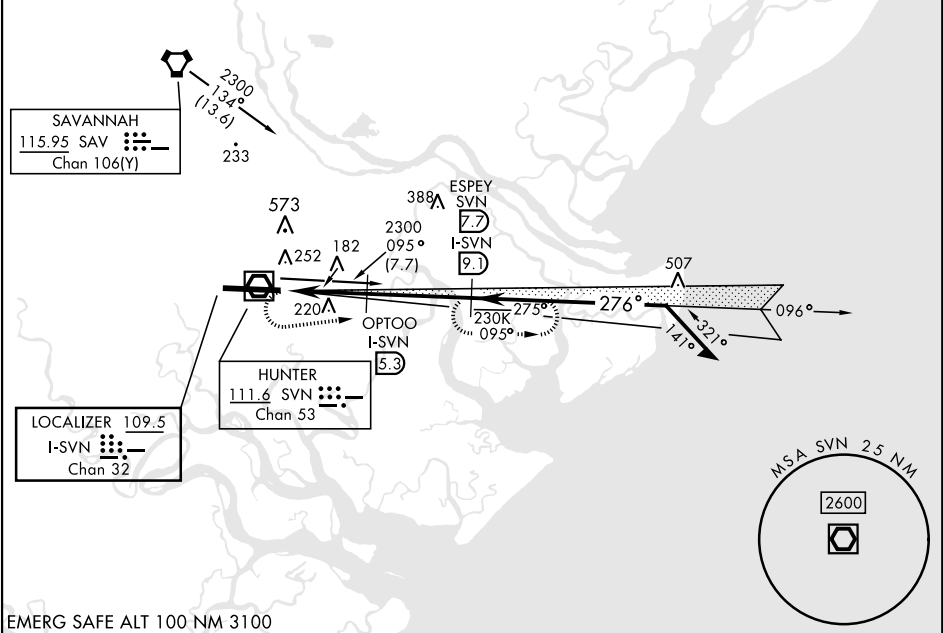

EMERG SAFE ALT 100 NM 3100

|                                            |           |                 |                 |              |         |
|--------------------------------------------|-----------|-----------------|-----------------|--------------|---------|
| 1000                                       | 2300      | ESPEY I-SVN 7.7 | ESPEY I-SVN 7.7 | ELEV 41      | TDZE 41 |
| hdg 050°                                   |           |                 |                 |              |         |
| I-SVN 2.7                                  | I-SVN 3.3 | OPTOO I-SVN 5.3 | OPTOO I-SVN 5.3 |              |         |
| 1100                                       | 2300      | 276°            | 096°            |              |         |
| 3.2 NM                                     | 3.8 NM    |                 |                 |              |         |
| CATEGORY                                   | A         | B               | C               | D            |         |
| S-ILS 28*                                  | 241/24    | 200             | (200-½)         |              |         |
| S-LOC 28**                                 | 480/24    | 439 (500-½)     | 480/40          | 439 (500-¾)  |         |
| ****                                       | 600-1     | 559 (600-1)     | 600-1½          | 620-2        |         |
| CIRCLING                                   | 600-1     | 559 (600-1)     | 559 (600-1½)    | 579 (600-2)  |         |
| LOCAL ALTIMETER, WITHOUT LAST STEPDOWN FIX |           |                 |                 |              |         |
| S-LOC 28***                                | 600/24    | 559 (600-½)     | 600/60          | 559 (600-1½) |         |
| ****                                       | 600-1     | 559 (600-1)     | 600-1½          | 620-2        |         |
| CIRCLING                                   | 600-1     | 559 (600-1)     | 559 (600-1½)    | 579 (600-2)  |         |
| REIL Rwy 10 0                              |           |                 |                 |              |         |
| HIRL Rwy 10-28 0                           |           |                 |                 |              |         |
| FAF to MAP 7 NM                            |           |                 |                 |              |         |
| Knots                                      | 60        | 90              | 120             | 150          | 180     |
| Min:Sec                                    | 7:00      | 4:40            | 3:30            | 2:48         | 2:20    |

ILS or LOC RWY 28