

LOC I-SCH 109.7	APP CRS 040°	Rwy Ldg TDZE Apt Elev	7001 338 378
---------------------------	------------------------	-----------------------------	---



ILS or LOC RWY 4
SCHENECTADY COUNTY (SCH)


NA Circling Rwy 10 NA at night. Inop table does not apply to S-ILS 4. For inop MALSRL, increase S-LOC 4 Cat A/B visibility to 1 mile and Cat C/D visibility to 1½ mile. For inoperative MALSRL when using Albany altimeter setting, increase S-LOC 4 Cat A/B visibility to 1mile. When using Albany altimeter setting inoperative table does not apply to S-ILS-4. ADF required. When local altimeter setting not received, use Albany altimeter setting and increase all DA 33 feet, and all MDA 40 feet. Helicopter visibility reduction below ¾ SM NA.	MALSRL AS MISSED APPROACH: Climb to 1500 on 040° course and on HEU NDB bearing 045° then climbing right turn to 3700 direct HEU NDB and hold, continue climb-in-hold to 3700.
AWOS-3 119.275 ALBANY APP CON 132.825 263.075	SCHENECTADY TOWER ★ 121.3 (CTAF) 0 321.1 GND CON 121.9 UNICOM 122.95

ALTERNATE MISSED APCH FIX

ALBANY
ALB 
115.3
Chan 100

← R-283 103°
283°

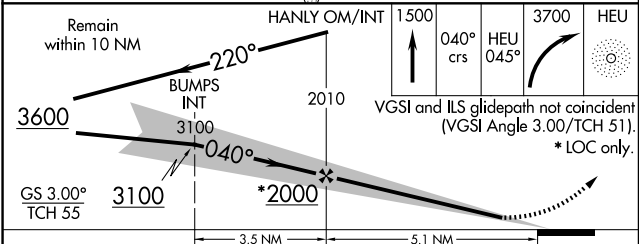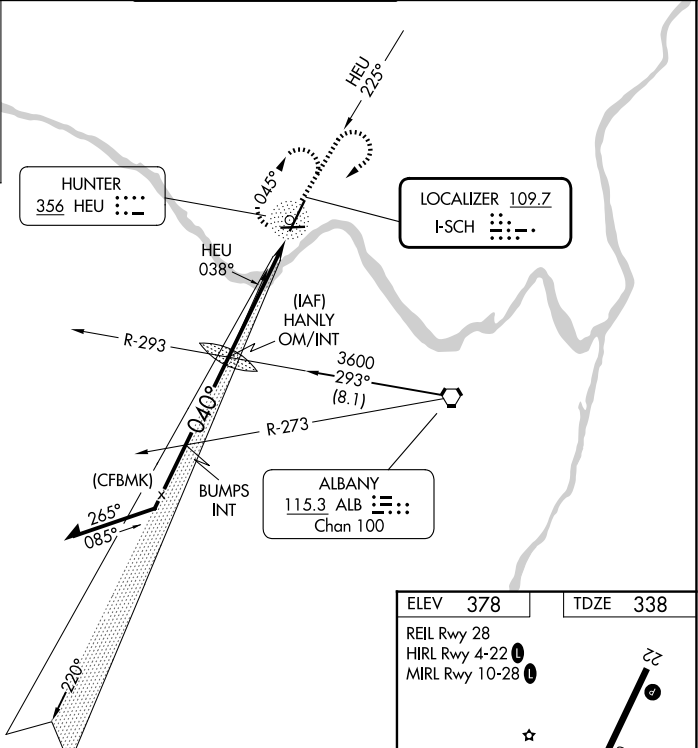

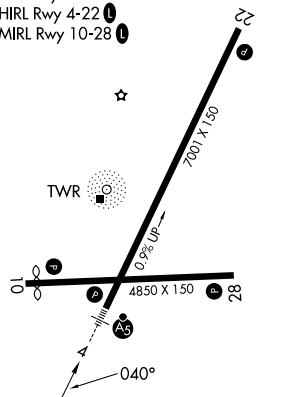ELEV 378	TDZE 338
REIL Rwy 28 HIRL Rwy 4-22 MIRL Rwy 10-28	
	
FAF to MAP 5.1 NM	
Knots	60 90 120 150 180
Min:Sec	5:06 3:24 2:33 2:02 1:42

CATEGORY	A	B	C	D
S-ILS 4	538-¾ 200 (200-¾)			
S-LOC 4	820-¾ 482 (500-¾)	820-1 482 (500-1)		
CIRCLING	880-1 502 (600-1)	940-1 562 (600-1)	1120-2¼ 742 (800-2¼)	1320-3 942 (1000-3)

NE-2, 22 JAN 2026 to 19 FEB 2026

NE-2, 22 JAN 2026 to 19 FEB 2026