

LOC I-FSD 109.9	APP CRS 030°	Rwy Ldg 8999 TDZE 1424 Apt Elev 1430
---------------------------	------------------------	---

ILS or LOC RWY 3
JOE FOSS FLD (FSD)

JOE FOSS FLD (FSD)

ADF or RADAR required.





For inop ALS, increase S-LOC 3 Cats C/D visibility to $1\frac{7}{8}$ SM, and S-LOC 3 MAREY fix minimums Cats C/D to $1\frac{3}{8}$ SM.



MISSED APPROACH: Climb to 3400 then left turn direct FSD VORTAC and hold.

ATIS 126.6	SIoux FALLS APP CON ★ 125.8 284.725	SIoux FALLS TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
---------------	--	---	------------------------	------------------

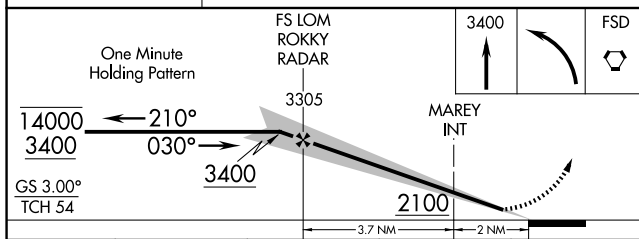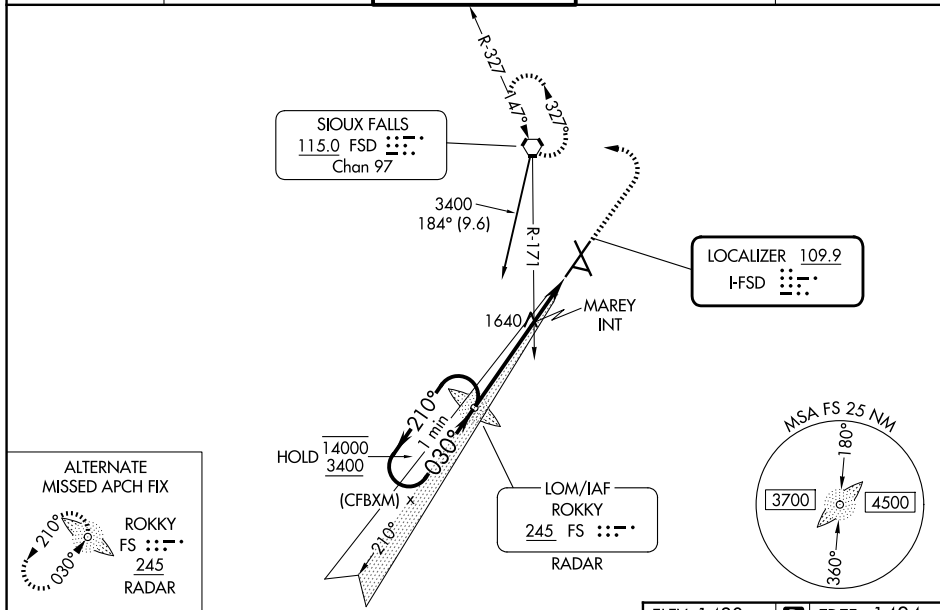

CATEGORY	A	B	C	D
S-ILS 3	1674/24 250 (300-½)			
S-LOC 3	2100/24 676 (700-½)		2100-1½ 676 (700-1½)	
CIRCLING	2100-1 670 (700-1)		2100-1⅞ 670 (700-1⅞)	2200-2½ 770 (800-2½)
MAREY FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 3	1940/24 516 (600-½)		1940/55 516 (600-1)	
CIRCLING	1980-1 550 (600-1)		2060-1¾ 630 (700-1¾)	2200-2½ 770 (800-2½)

