

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>60908</b><br><b>W09B</b> | APP CRS<br><b>094°</b> | Rwy Ldg <b>8412</b><br>TDZE <b>790</b><br>Apt Elev <b>798</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 9R  
SOUTH BEND INTL (SBN)



RNP APCH - GPS.

- T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.  
**A** Circling Rwy 27R NA at night. Rwy 9R helicopter visibility reduction below RVR 4000 NA.  
 For inop ALS, increase LPV all Cats visibility to RVR 5500 and LNAV Cat C/D to RVR 6000

MALSI

**MISSED APPROACH:**  
Climb to 2600 direct  
ISUYO and hold.

|                 |                                     |                                             |                  |
|-----------------|-------------------------------------|---------------------------------------------|------------------|
| ATIS<br>120.675 | SOUTH BEND APP CON★<br>118.55 257.8 | SOUTH BEND TOWER★<br>135.675 (CTAF) 0 257.8 | GND CON<br>121.7 |
|-----------------|-------------------------------------|---------------------------------------------|------------------|

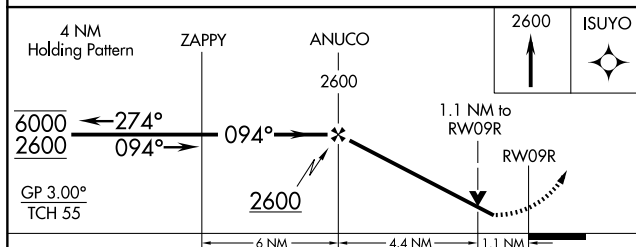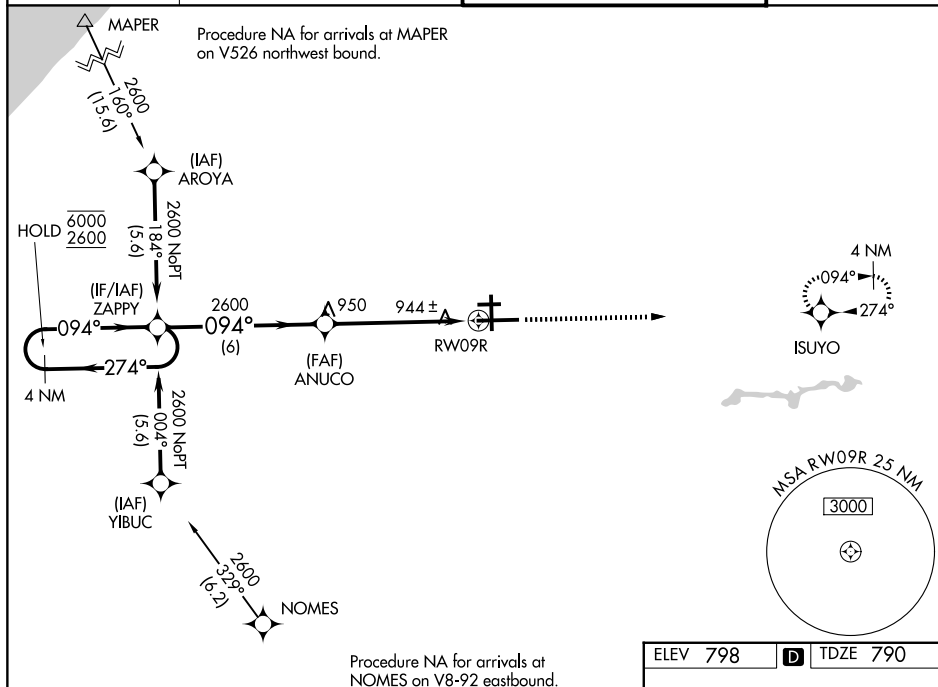

| CATEGORY         | A                     | B                           | C                           | D |
|------------------|-----------------------|-----------------------------|-----------------------------|---|
| LPV DA           | 1135/40 345 (400-3/4) |                             |                             |   |
| LNAV/<br>VNAV DA | 1222/50 432 (500-1)   |                             |                             |   |
| LNAV MDA         | 1200/40 410 (500-3/4) | 1200/50 410 (500-1)         |                             |   |
| CIRCLING         | 1280-1 482 (500-1)    | 1440-13/4<br>642 (700-13/4) | 1500-21/4<br>702 (800-21/4) |   |

