

HI-TACAN Z RWY 22R

TACAN SSC	APCH CRS	22R	22L
Chan 38	222°	Rwy Idg 10,014	8014
		TDZE 240	235
		Arpt Elev 241	241

[USAF]

SHAW AFB (KSSC)


RADAR required when R-6002 active.

▲ * When ALS inop, increase vis to 1½ miles.
** When ALS inop, increase vis to 1¾ miles.

ALSF-1

MISSED APPROACH: Climbing to 2000, intercept SSC TACAN R-223 to PINIE and hold.

ATIS★	APP CON★	TOWER★	GND CON
132.125 270.1	125.4 318.1	126.65 254.25	126.1 275.8

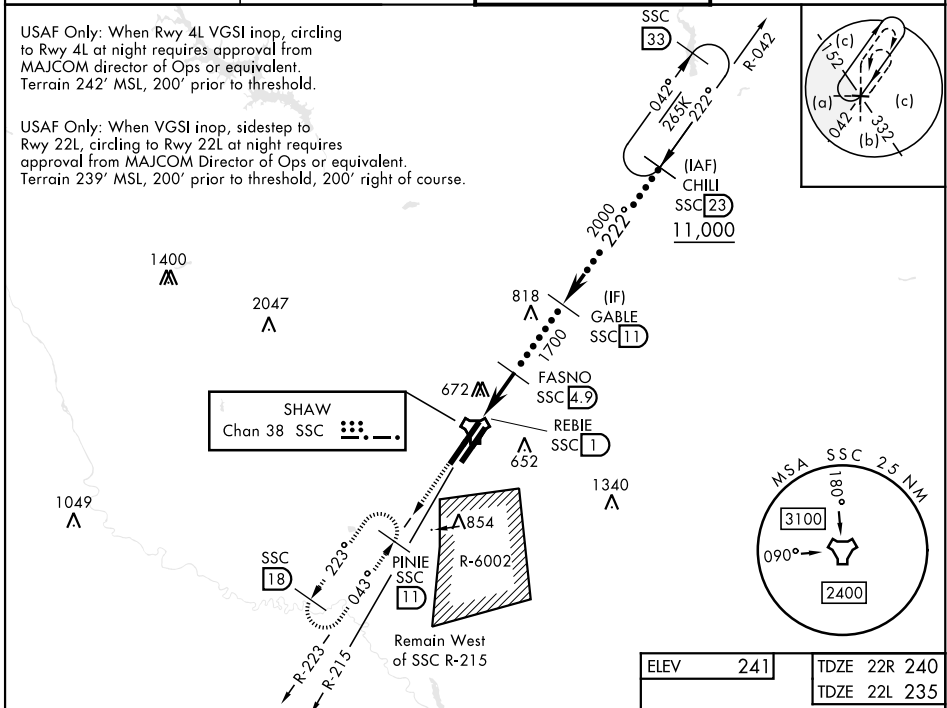

EMERG SAFE ALT 100 NM 3800

2000 SSC R-223, PINIE SSC 11, FASNO SSC 4.9, GABLE SSC 11, CHILI SSC 23, SSC TACAN, REBIE SSC 1.

0.6 NM, 3.9 NM, 2.95°, TCH 52, 1700, 2000, 11,000.

CATEGORY	C	D	E
S-22R*	760/55	520 (600-1)	
SIDESTEP 22L**	760/55	505 (600-1)	
CIRCLING	1000-2¼ 759 (800-2¼)	1000-2½ 759 (800-2½)	1000-2¾ 759 (800-2¾)

ELEV 241, TDZE 22R 240, TDZE 22L 235.

Diagram of runway 22R/22L with altitudes (519, 502, 450, 392, 268) and navigation aids (A1, A2, P, TW, TWR 340).

HI-TACAN Z RWY 22R

SE-2, 22 JAN 2026 to 19 FEB 2026