
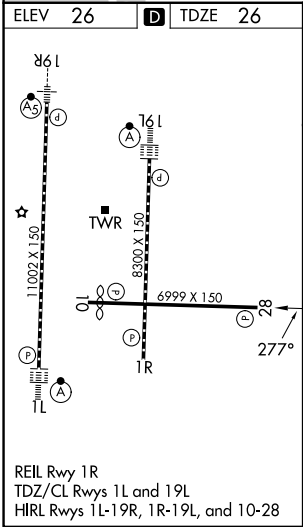


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F).  
DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct POLVY and hold.

|                      |                          |                                       |                                   |                               |                          |       |
|----------------------|--------------------------|---------------------------------------|-----------------------------------|-------------------------------|--------------------------|-------|
| ARR<br><b>126.45</b> | D-ATIS<br><b>128.475</b> | TAMPA APP CON<br><b>118.5 307.175</b> | TAMPA TOWER<br><b>119.5 269.4</b> | GND CON<br><b>121.7 269.4</b> | CLNC DEL<br><b>133.6</b> | CPDLC |
|----------------------|--------------------------|---------------------------------------|-----------------------------------|-------------------------------|--------------------------|-------|

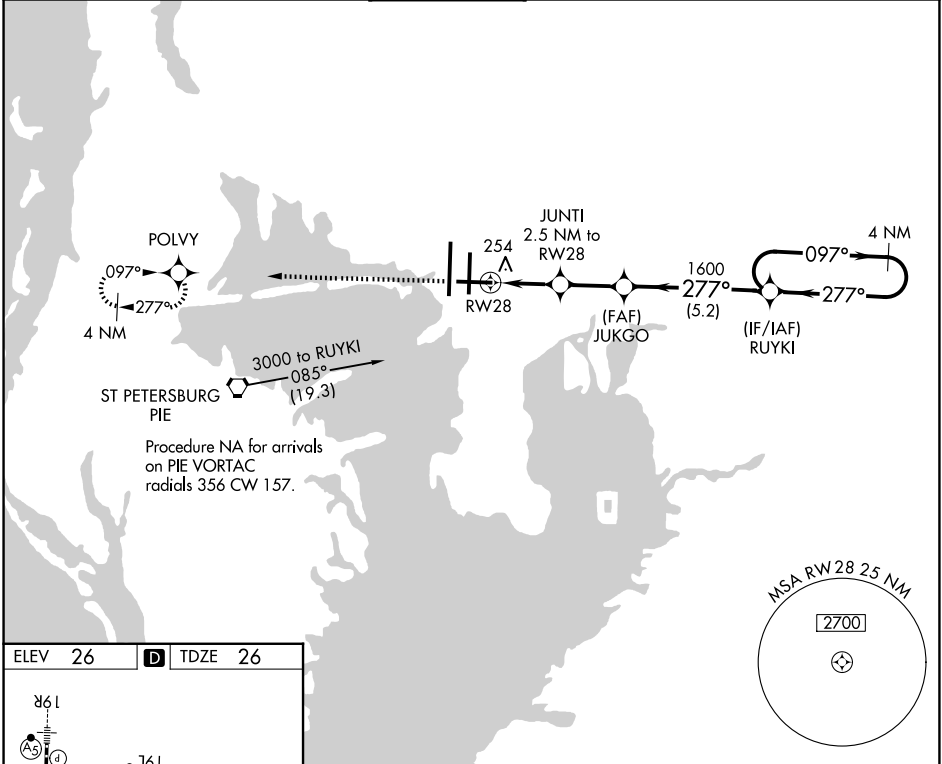

|              |                        |             |                        |                       |
|--------------|------------------------|-------------|------------------------|-----------------------|
| 2000         | POLVY                  | JUKGO       | RUYKI                  | 4 NM Holding Pattern  |
| * LNAV only. | JUNTI 2.5 NM to RWY 28 | 1600        | 277°                   | 097° → 2000           |
|              | 860*                   | 1600        | 277°                   | GP 3.00°<br>TCH 50    |
|              | 2.5 NM                 | 2.3 NM      | 5.2 NM                 |                       |
| CATEGORY     | A                      | B           | C                      | D                     |
| LPV DA       | 389-1½                 |             | 363 (400-1½)           |                       |
| LNAV/VNAV DA | 468-1½                 |             | 442 (500-1½)           |                       |
| LNAV MDA     | 520-1                  | 494 (500-1) | 520-1½                 | 494 (500-1½)          |
| CIRCLING     | 600-1                  | 574 (600-1) | 680-1¾<br>654 (700-1¾) | 980-3<br>954 (1000-3) |