

LOC/DME I-TXK	APP CRS	Rwy Ldg	6602
111.9	220°	TDZE	384
Chan 56		Apt Elev	390


ILS or LOC RWY 22
TEXARKANA RGNL-WEBB FLD (TXK)

For inop ALS, increase S-LOC 22 Cats C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 900 then climbing right turn to 2000 direct TXK VORTAC and hold, continue climb-in-hold to 2000.

ATIS	FORT WORTH CENTER	TEXARKANA TOWER★	GND CON
120.2	123.925 269.475	123.875 (CTAF) 0 235.625	119.225

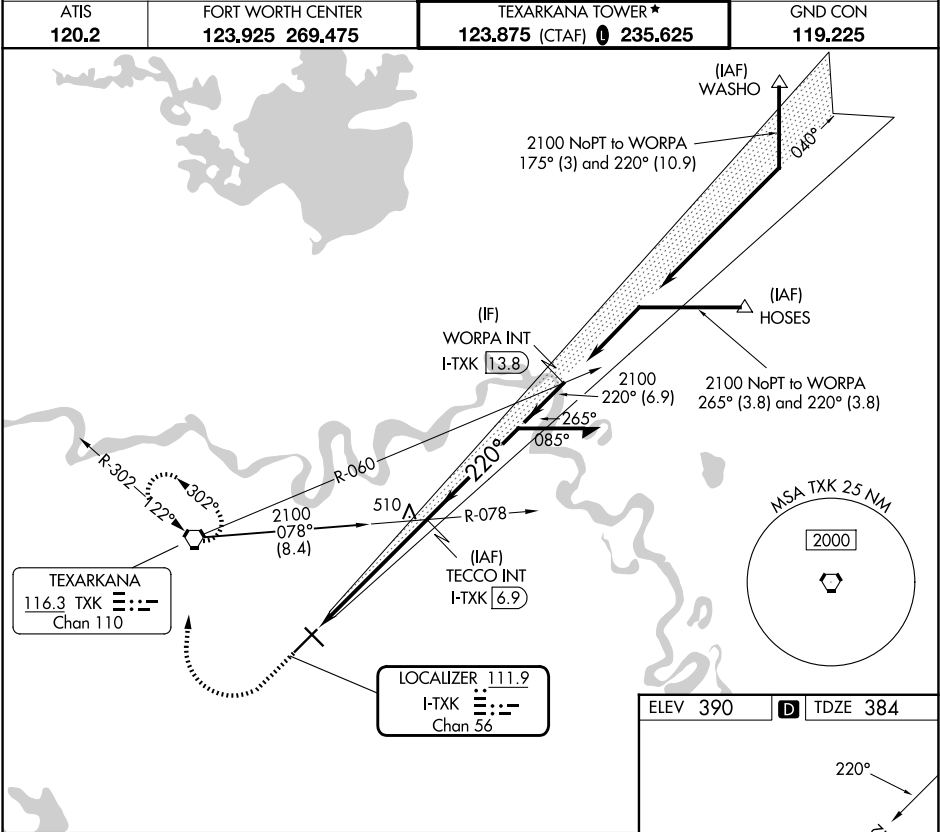

900

2000

TXK

TECCO INT I-TXK 6.9

Remain within 10 NM

I-TXK 1.3

I-TXK 2.4

2100

220°

2100

GS 2.75°

TCH 48

CATEGORY	A	B	C	D
S-ILS 22	584-1/2 200 (200-1/2)			
S-LOC 22	760-1/2 376 (400-1/2)	760-5/8 376 (400-5/8)		
CIRCLING	820-1 430 (500-1)	900-1 510 (600-1)	1000-1 3/4 610 (700-1 3/4)	1080-2 1/4 690 (700-2 1/4)

ELEV 390

TDZE 384

220°

13

2

31

200 X 100

6602 X 150

0.7% UP

0.5% UP

TWR

A5

MIRL Rwy 13-31

HIRL Rwy 4-22

FAF to MAP 5.6 NM

Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52