

WAAS Ch 93899 W04A	APP CRS 040°	Rwy Ldg 6602 TDZE 360 Apt Elev 390
--	------------------------	---



RNAV (GPS) RWY 4
TEXARKANA RGNI-WEBB FLD (TXK)

▼ DME/DME RNP-0.3 NA Visibility reduction by helicopters NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). When local altimeter setting not received, use J Lynn Helms Sevier County altimeter setting and increase all DA/MDA 100 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, LNAV and Circling Cat C and D visibility ¼ mile.


▲ Baro-VNAV NA when using J Lynn Helms Sevier County altimeter setting.

MISSED APPROACH.
Climb to 2100 direct
WORPA and hold.

ATIS 120.2	FORT WORTH CENTER 123.925 269.475	TEXARKANA TOWER★ 123.875 (CTAF) 0 235.625	GND CON 119.225
----------------------	---	---	---------------------------

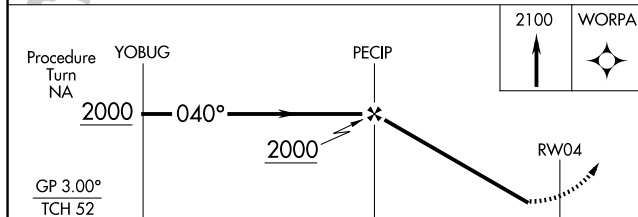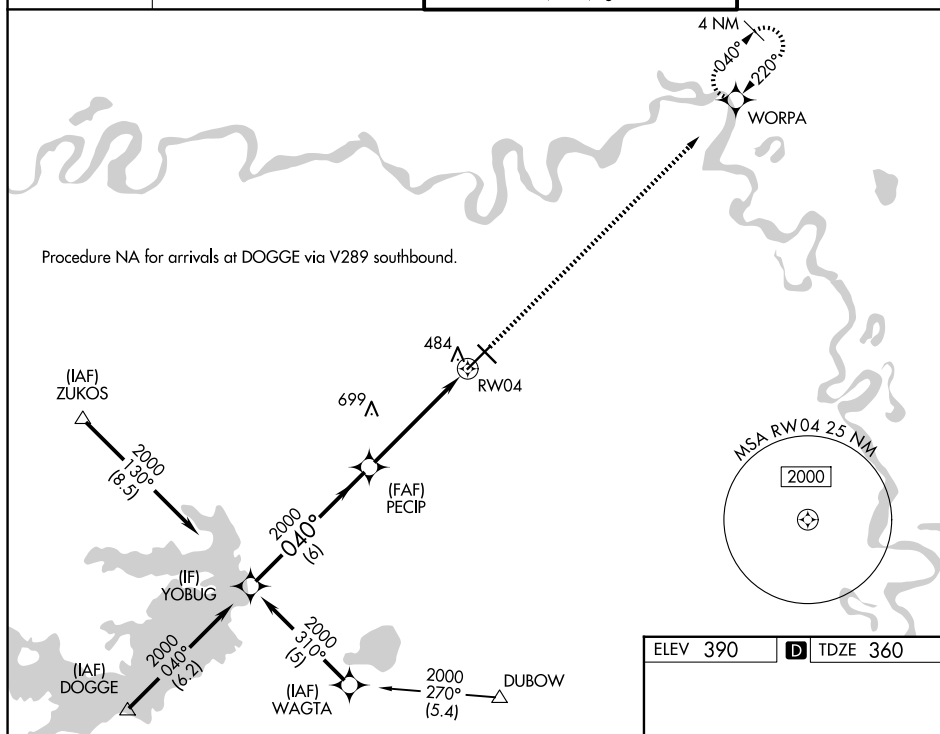

CATEGORY		A		B	C	D
LPV	DA	613-1 253 (300-1)				
RNAV/ VNAV	DA	866-1 $\frac{3}{4}$ 506 (500-1 $\frac{3}{4}$)				
RNAV MDA		900-1	540 (600-1)	900-1 $\frac{1}{2}$ 540 (600-1 $\frac{1}{2}$)	900-1 $\frac{3}{4}$ 540 (600-1 $\frac{3}{4}$)	
CIRCLING		900-1 $\frac{3}{4}$	510 (600-1 $\frac{3}{4}$)	1000-2 610 (700-2)	1080-2 $\frac{1}{4}$ 690 (700-2 $\frac{1}{4}$)	

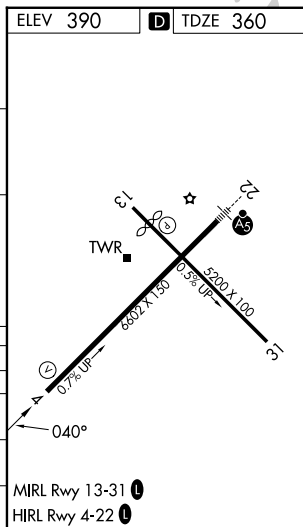

RNAV (GPS) RWY 4