

WAAS CH 53511 W12A	APP CRS 118°	Rwy Ldg TDZE Apt Elev	7314 23 24
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 12R

VERO BEACH RGNL (VRB)


⚠

⚠

Circling to Rwy 30R NA at night. Baro-VNAV NA when using Fort Pierce altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Pierce altimeter setting and increase LPV DA to 302 feet; increase LNAV/VNAV DA to 317 feet; increase all MDAs 40 feet and LNAV Cat C/D visibility ½ SM and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH:
Climb to 2000 direct PUUMA and hold.

ATIS 120.575	PALM BEACH APP CON 123.625 225.4 (N)	VERO BEACH TOWER ★ 126.3 (CTAF) 0	GND CON 127.45	UNICOM 122.95
------------------------	--	---	--------------------------	-------------------------

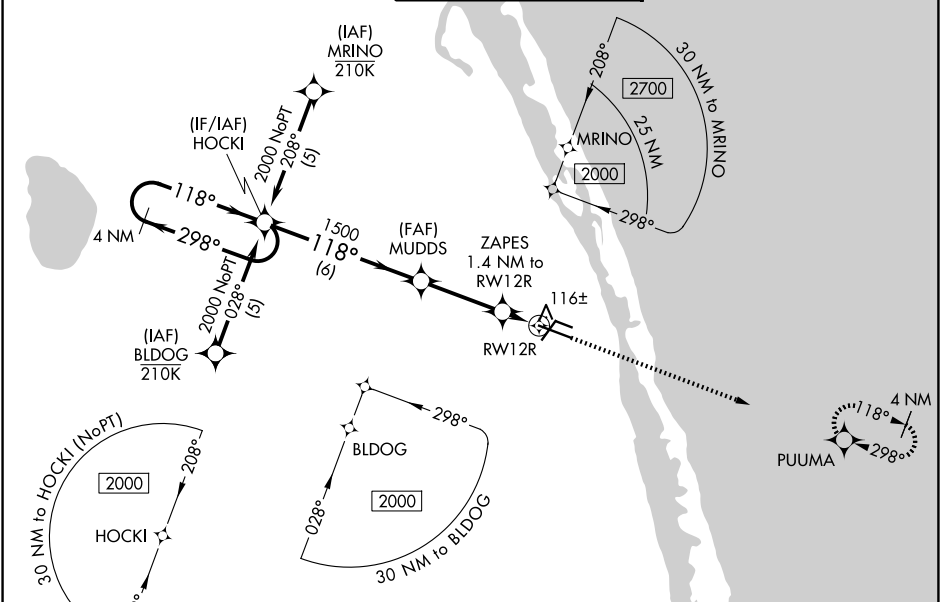

ELEV 24

D

TDZE 23

4 NM Holding Pattern

HOCKI

2000

298°

118°

GP 3.00°

TCH 42

MUDDS

1500

ZAPES

1.4 NM to RWY 12R

RWY 12R

*500

*LNAV only.

PUUMA

2000

CATEGORY	A	B	C	D
LPV DA		279-¾	256 (300-¾)	
LNAV/VNAV DA		294-⅞	271 (300-⅞)	
LNAV MDA		380-1	357 (400-1)	
CIRCLING	560-1	536 (600-1)	660-1¾ 636 (700-1¾)	820-2½ 796 (800-2½)

MIRL Rwy 4-22, 12R-30L, and 12L-30R 0
REIL Rwy 4, 12R, 22 and 30L 0