

VORTAC ACT	APP CRS	Rwy Ldg	5103
115.3	321°	TDZE	516
Chan 100		Apt Elev	516

VOR/DME RWY 32
WACO RGNL (ACT)





ASR

VDP NA with Mc Gregor Exec altimeter setting. When local altimeter setting not received use Mc Gregor Exec altimeter setting and increase all MDA 40 feet; increase S-32 Cats C/D visibility 1/8 mile and Circling Cat D visibility 1/4 mile.

MISSED APPROACH: Climb to 3000 direct ACT VORTAC and hold, continue climb-in-hold to 3000.

ATIS 123.85	WACO APP CON* 127.65 227.125	WACO TOWER* 119.3 (CTAF) 257.8	GND CON 121.9	UNICOM 122.95
----------------	---------------------------------	-----------------------------------	------------------	------------------

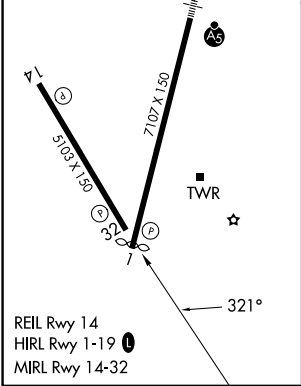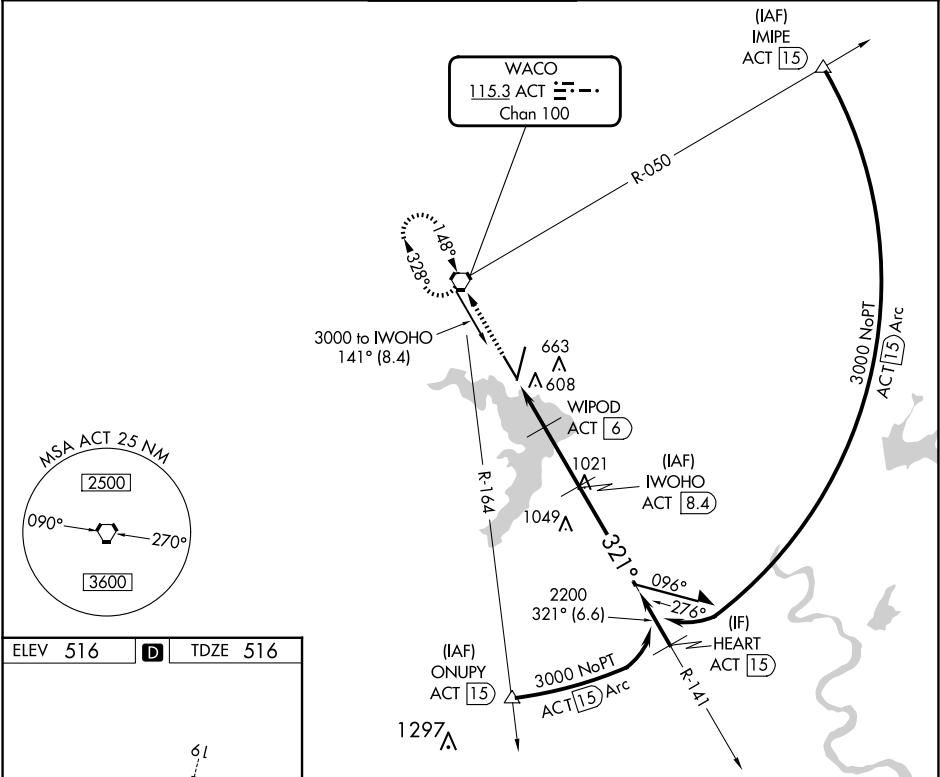

3000 ↑	ACT 	IWOHO ACT [8.4]	Remain within 10 NM	
WIPOD ACT [6]		ACT [4.9]	3000	
ACT [4]		1300	2200	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 58).
0.9		1.1 NM	2.4 NM	
CATEGORY	A	B	C	D
S-32	860-1 344 (400-1)			
 CIRCLING	940-1 424 (500-1)	980-1 464 (500-1)	1020-1½ 504 (600-1½)	1160-2 644 (700-2)