
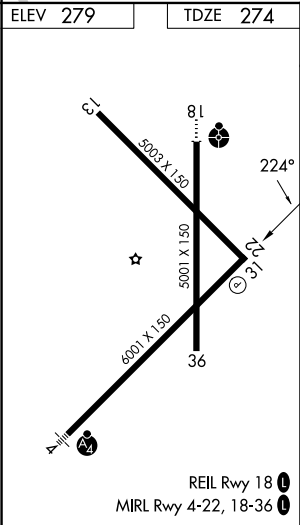



WAAS CH 82125 W22A	APP CRS 224°	Rwy Ldg TDZE 6001 274 Apt Elev 279	RNAV (GPS) RWY 22 WALNUT RIDGE RGNL (ARG)
--	------------------------	--	---

⚠ Baro-VNAV NA when using Jonesboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. VDP NA with Jonesboro altimeter setting. When local altimeter setting not received, use Jonesboro altimeter setting and increase LPV and LNAV/VNAV DA to 578 feet, and all MDAs 60 feet; increase LNAV Cats C/D visibility ½ SM and Circling Cat D visibility ¼ SM.

MISSED APPROACH:
Climb to 2700 direct
XIHAM and hold.

AWOS-3PT 126.525	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

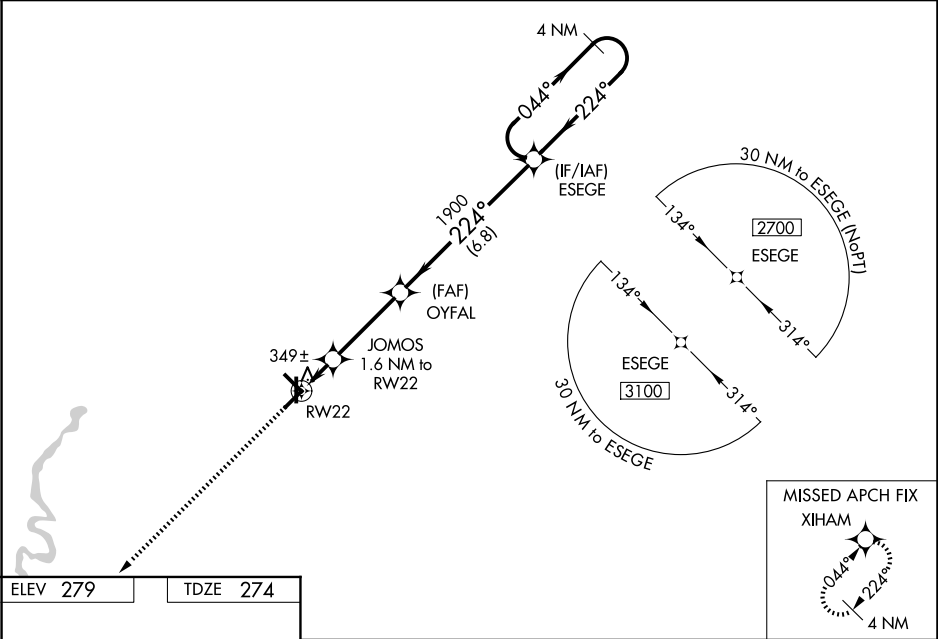

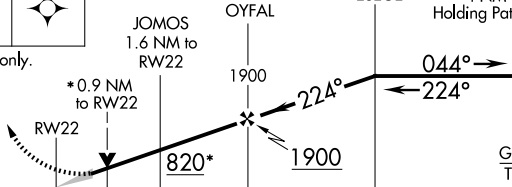2700 ↑	XIHAM ✦				
*LNAV only.					
					
CATEGORY	A	B	C	D	
LPV DA	524-1 250 (300-1)				
LNAV/ VNAV DA	524-1 250 (300-1)				
LNAV MDA	600-1 326 (400-1)				
CIRCLING	760-1 481 (500-1)		800-1½ 521 (600-1½)	1000-2¼ 721 (800-2¼)	