


WAAS CH 45825 W36A	APP CRS 359°	Rwy Ldg TDZE Apt Elev	5001 274 279
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 36
WALNUT RIDGE RGNL (ARG)

Baro-VNAV NA when using Jonesboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jonesboro altimeter setting and increase LPV DA to 528 feet, LNAV/VNAV DA to 628 feet, and all MDAs 60 feet; increase LNAV Cats C/D and Circling Cat D visibility ¼ SM.

MISSED APPROACH:
Climb to 2700 direct EYPEB and hold.

AWOS-3PT 126.525	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

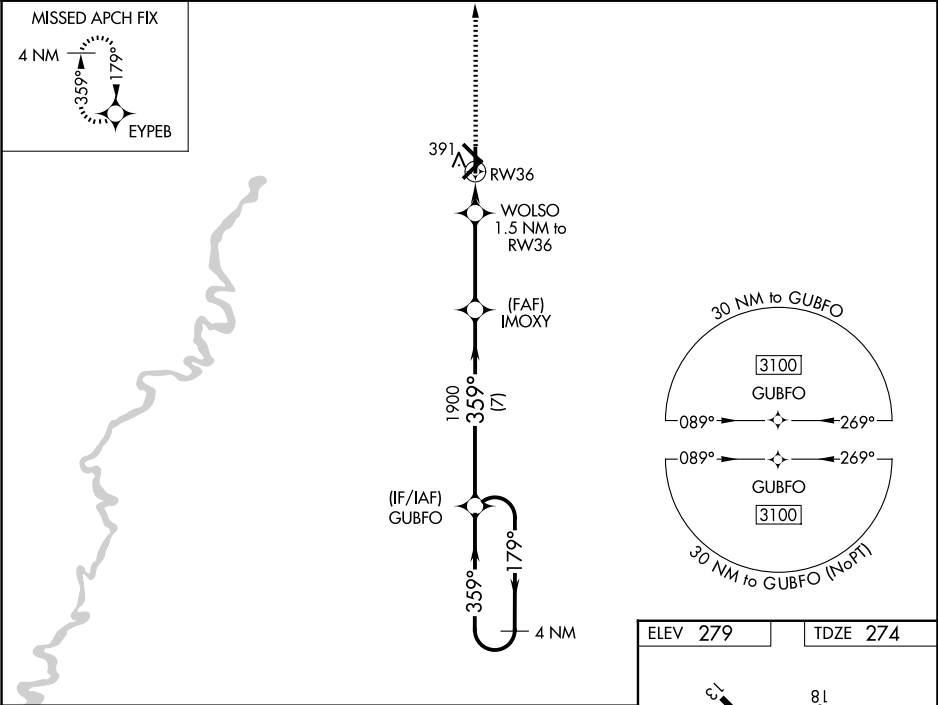

2700 EYPEB

*LNAV only.

WOLSO 1.5 NM to RW36

IMOXY 1900

GUBFO 3100

4 NM Holding Pattern

179°

359°


780*

1900

GP 3.00°

TCH 45

CATEGORY	A	B	C	D
LPV DA		474-1	200 (200-1)	
LNAV/VNAV DA		574-1	300 (300-1)	
LNAV MDA	660-1	386 (400-1)	660-1 ½	386 (400-1 ½)
CIRCLING	760-1	481 (500-1)	800-1 ½ 521 (600-1 ½)	1000-2 ¼ 721 (800-2 ¼)

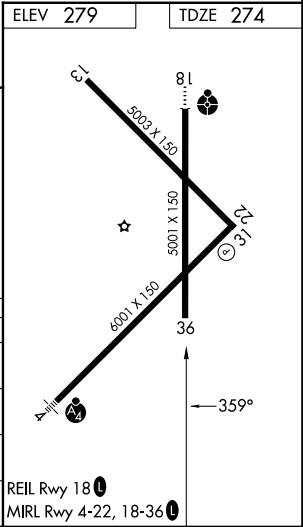

SC-1, 22 JAN 2026 to 19 FEB 2026

SC-1, 22 JAN 2026 to 19 FEB 2026