

LOC I-ILM	APP CRS	Rwy Ldg	7204
110.3	349°	TDZE	31
		Apt Elev	32

ILS Y or LOC RWY 35

WILMINGTON INTL (ILM)



ADF required. RADAR required for procedure entry.

MALSR

For inop ALS, increase S-LOC 35 Cat C/D visibility to 1½ SM.

MISSED APPROACH: Climb to 600 then climbing left turn to 1800 direct AIRLI LOM and hold.

ATIS	WILMINGTON APP CON★	WILMINGTON TOWER★	GND CON	UNICOM
124.975	118.25 284.65 (164°-343°) 135.75 317.425 (344°-163°)	119.9 (CTAF) 0 239.3	121.9 348.6	122.95

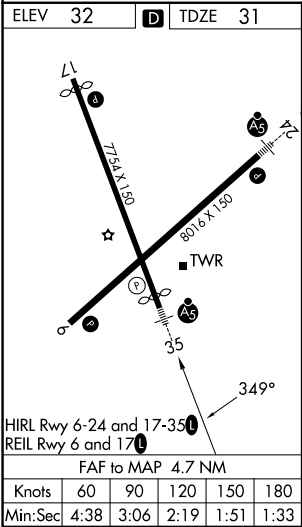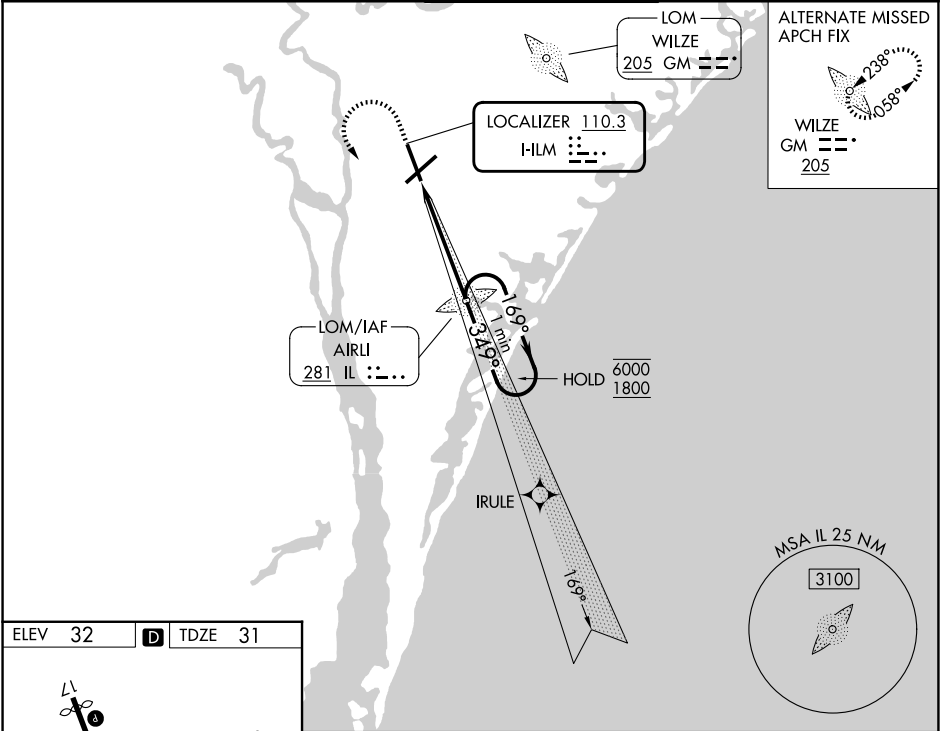

600	1800	IL	IL LOM	1576	One Minute Holding Pattern
349°	169°	1700	349°	6000	1800
GS 3.00°	TCH 37	4.7 NM			
CATEGORY	A	B	C	D	
S-ILS 35	242/24 211 (300-½)				
S-LOC 35	500/24 469 (500-½)		500/50 469 (500-1)		
CIRCLING	560-1 528 (600-1)		720-2 688 (700-2)		920-3 888 (900-3)