

WAAS CH 93831 W13A	APP CRS 132°	Rwy Idg TDZE Apt Elev	5003 2822 2822
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 13
WINKLER COUNTY (INK)

RNP APCH - GPS.

⚠ Baro-VNAV NA when using Pecos altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. VDP NA with Pecos altimeter setting. Rwy 13 helicopter visibilities reduction below ¾ SM NA. When local altimeter setting not received, use Pecos altimeter setting: increase LPV DA to 3167 feet and all Cats visibilities ¼ SM; increase LNAV/VNAV DA to 3167 feet and all Cats visibilities ¼ SM; increase all MDAs 100 feet and LNAV Cat C visibility ¾ SM and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 5000 direct
BORTY and hold.

ASOS 118.325	FORT WORTH CENTER 133.1 298.95	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

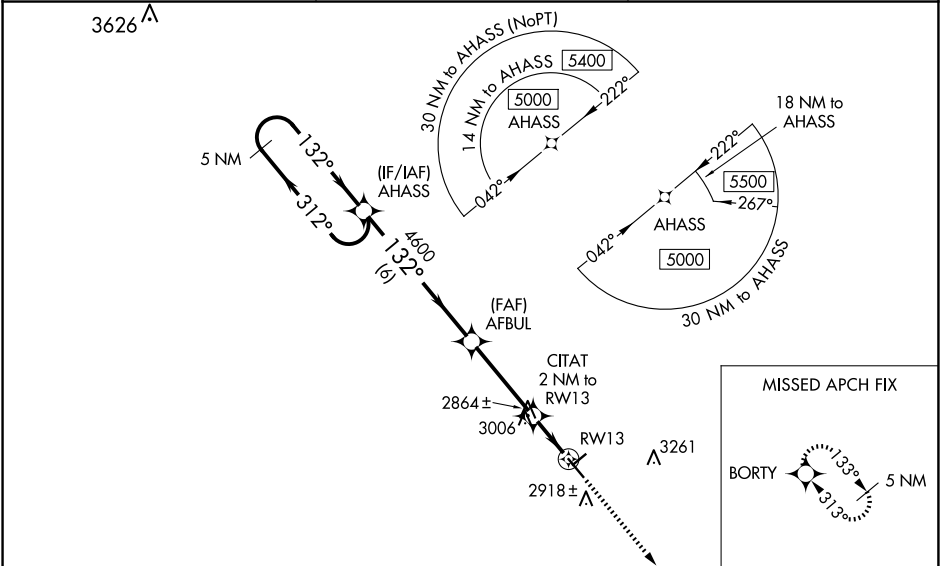

5 NM Holding Pattern 5000 ← 312° 132° → GP 3.00° TCH 45					AHASS AFBUL 4600 CITAT 2 NM to RW13 0.8 NM to RW13 5000 BORTY 5000 4600 3500 6 NM 3.4 NM 1.2 NM 0.8					ELEV 2822 TDZE 2822 132° 3514 X 100 5003 X 100 31				
CATEGORY		A		B		C		D						
LPV DA		3072-¾		250 (300-¾)				NA						
LNAV/VNAV DA		3072-¾		250 (300-¾)				NA						
LNAV MDA		3320-1 498 (500-1)				3320-1⅜ 498 (500-1⅜)		NA						
CIRCLING		3320-1 498 (500-1)				3580-2¼ 758 (800-2¼)		NA						
MIRL Rwy 4-22 and 13-31														

MIRL Rwy 4-22 and 13-31 0