EL CENTRO, CALIFORNIA

RNAV (GPS) RWY 8

WAAS CH 89932 W08A	APCH CRS 079°	Rwy ldg 9503 TDZE -46 Arpt Elev -42

(USN)

EL CENTRO NAF (VRACIU FLD) (KNJK)

RNP APCH

Circling visibility reduction by helicopters NA.
When tower closed, increase visibility to 1 mile.

MISSED APPROACH: Climb to 800, then climbing right turn to 2400 direct BEENY and hold.

ATIS★	APP CON/DEP CON	TOWER★	GND CON
269.275	132.275 292.2	119.1 360.2	121.9 254.35

Circling to Rwy 30 NA at night.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (129°F).

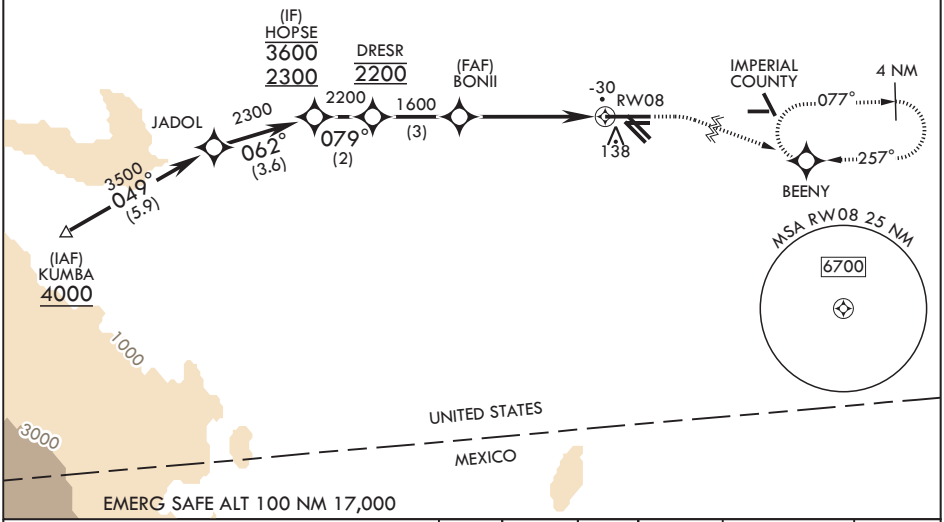

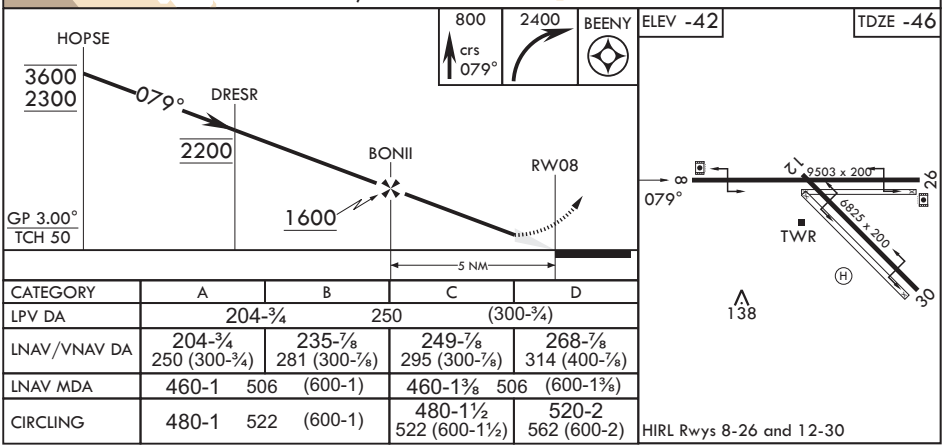

CATEGORY	A	B	C	D
LPV DA	204-¾ 250 (300-¾)			
LNAV/VNAV DA	204-¾ 250 (300-¾)	235-⅞ 281 (300-⅞)	249-⅞ 295 (300-⅞)	268-⅞ 314 (400-⅞)
LNAV MDA	460-1 506 (600-1)		460-1⅜ 506 (600-1⅜)	
CIRCLING	480-1 522 (600-1)		480-1½ 522 (600-1½)	520-2 562 (600-2)

SW-3, 22 JAN 2026 to 19 FEB 2026
SW-3, 22 JAN 2026 to 19 FEB 2026