

WAAS CH 40303 W21A	APP CRS 211°	Rwy Ldg TDZE 404 Apt Elev 410
--	------------------------	---

RNAV (GPS) Y RWY 21R


TRI-CITIES (PSC)

⚠ Baro-VNAV NA when using Hermiston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Hermiston altimeter setting. When local altimeter setting not received, use Hermiston altimeter setting and increase all DA 95 feet and all MDA 100 feet; increase LNAV/VNAV all Cats visibility 3⁄8 mile; LNAV Cat C and D visibility 3⁄8 mile and Circling Cat C and D visibility 1⁄4 mile.
RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Hermiston altimeter setting.

MALSR

MISSED APPROACH:
Climb to 1100 then climbing right turn to 5200 direct PAIDS and hold, continue climb-in-hold to 5200.

ATIS 125.65	SPOKANE APP CON ★ 128.75 377.2	TRI-CITIES TOWER ★ 135.3 (CTAF) 0 285.55	GND CON 121.8	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

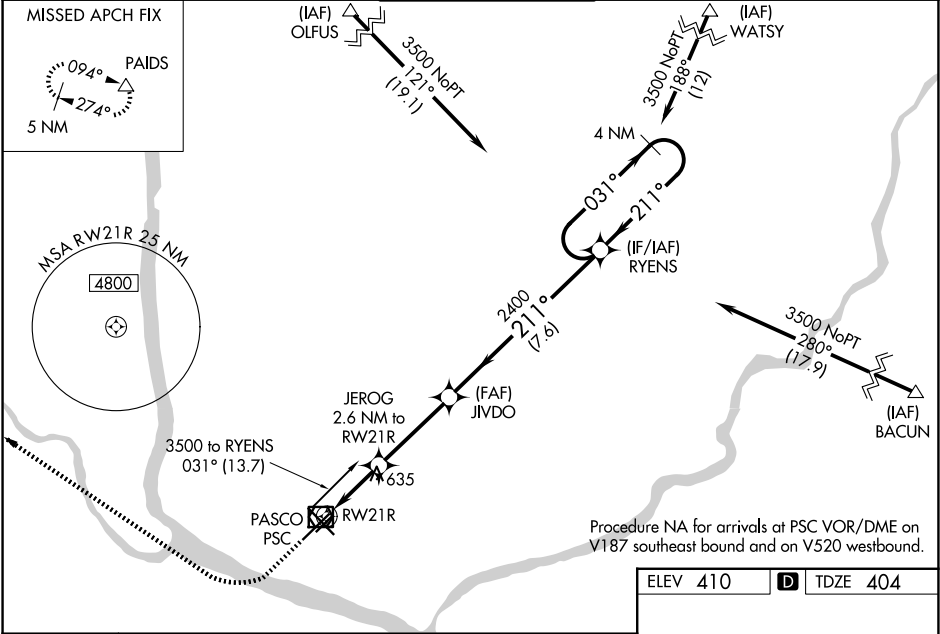

1100	5200	PAIDS
↑	↗	△
*LNAV only		
RW21R		
*1.5 NM to RW21R		
JIVDO		
RYENS		
4 NM Holding Pattern		
031°		
211°		
2400		
3500		
GP 3.00° TCH 55		
1.5 NM		
1.1 NM		
3.5 NM		
7.6 NM		
1280*		
CATEGORY		
A		
B		
C		
D		
LPV	DA#	604/24 200 (200-½)
LNAV/VNAV	DA	844/51 440 (500-1)
LNAV	MDA	940/24 536 (600-½)
		940/55 536 (600-1)
CIRCLING	940-1 530 (600-1)	1040-1¾ 630 (700-1¾)
		1100-2¾ 690 (700-2¾)