


WAAS CH 97518 W25A	APP CRS 256°	Rwy Ldg TDZE Apt Elev	6248 5507 5507
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 25
FOUR CORNERS RGNL (FMN)

RNP APCH-GPS.		MISSED APPROACH: Climb to 8000 direct HASIT and hold.
Baro-VNAV and VDP NA when using Durango altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA for Cat D southeast of Rwy 5 and south of Rwy 25. When local altimeter setting not received, use Durango altimeter setting and increase LPV DA to 5950 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 6312 feet and all visibilities ½ SM. Increase all MDAs 260 feet and LNAV visibilities Cat C/D ¼ SM, and Circling visibility Cat B ¼ SM and Cat C ½ SM.		

ATIS 127.15	DENVER CENTER 118.575 348.7	FARMINGTON TOWER ★ 118.9 (CTAF) 257.8	GND CON 121.7	UNICOM 122.95
-----------------------	---------------------------------------	---	-------------------------	-------------------------

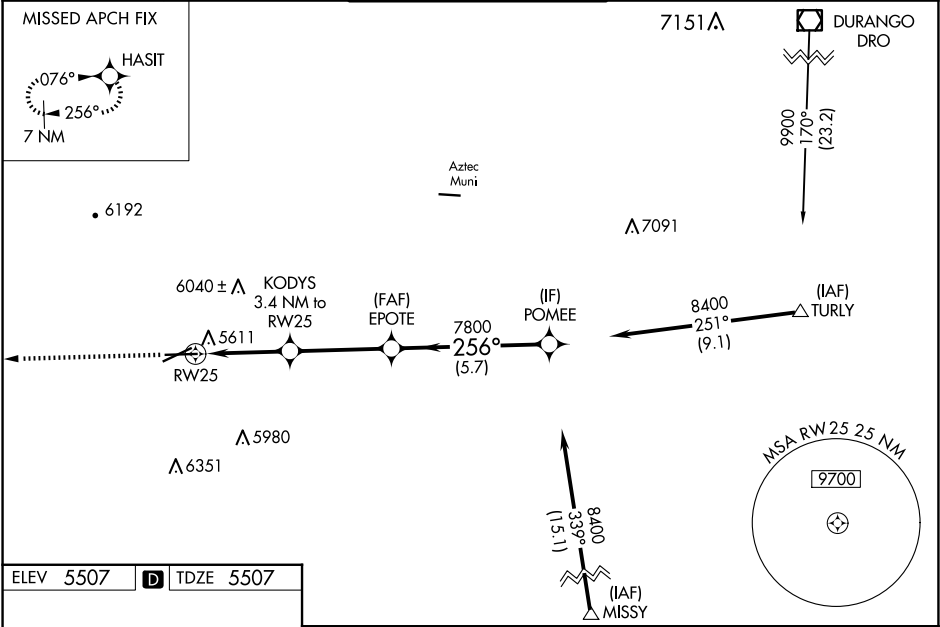

ELEV 5507	D	TDZE 5507
-----------	---	-----------

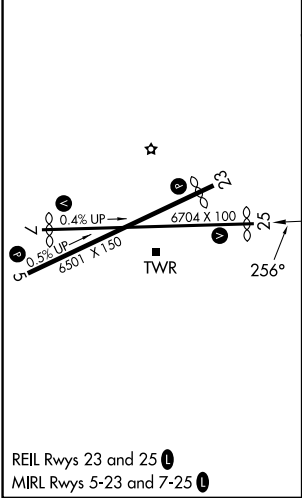

8000

HASIT

↑

✦

KODYS

3.4 NM to RW25

EPOTE

7800

POMEE

8400

1.9 NM to RW25

6640

25°

7800

GP 3.00°

TCH 56

RW25

1.9

1.5

3.6 NM

5.7 NM

CATEGORY	A	B	C	D
LPV DA	5707- ³ / ₄ 200 (200- ³ / ₄)			
LNAV/VNAV DA	6069-1 ⁵ / ₈ 562 (600-1 ⁵ / ₈)			
LNAV MDA	5880-1 373 (400-1)			
CIRCLING	6020-1 513 (600-1)	6140-1 633 (700-1)	6380-2 ¹ / ₂ 873 (900-2 ¹ / ₂)	6400-3 893 (900-3)