

WAAS CH 86232 W13A	APP CRS 126°	Rwy Ldg TDZE 593 Apt Elev 595	5601
--	------------------------	---	-------------

RNAV (GPS) RWY 13

SAN MARCOS RGNL (HYI)


RNP APCH-GPS.

⚠ Circling NA for Cat E southwest of Rwy 13-31. Inop table does not apply to LPV all Cats.
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
For inop ALS, increase LNAV/VNAV Cat E visibility to 1 SM and LNAV Cat E visibility to 1½ SM.

MALS

MISSED APPROACH:
Climb to 3000 direct
HODAL and hold.

ATIS 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER★ 126.825 (CTAF) 0	GND CON 120.125
------------------------	---------------------------------------	---	---------------------------

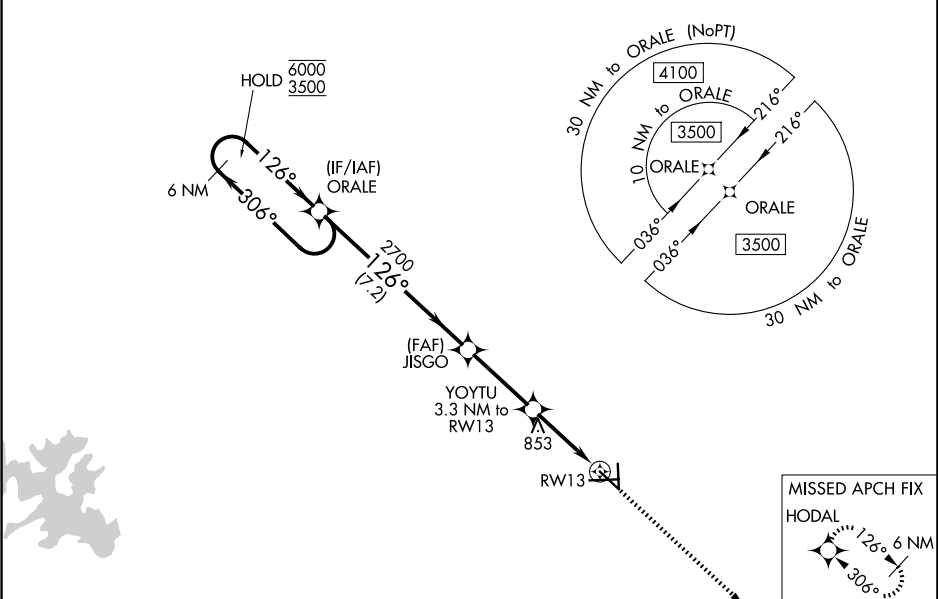

ELEV 595

TDZE 593

6 NM Holding Pattern

ORALE

JISGO

YOYTU

RW13

3000

HODAL

GP 3.00°

TCH 57

6000

3500

2700

1700

7.2 NM

3.1 NM

1.8 NM

1.5 NM

CATEGORY	A	B	C	D	E
LPV DA	793-¾ 200 (200-¾)				
LNAV/VNAV DA	946-¾ 353 (400-¾)				
LNAV MDA	1120-¾	527 (600-¾)	1120-1¼ 527 (600-1¼)		
CIRCLING	1120-1	525 (600-1)	1240-1¾ 645 (700-1¾)	1320-2¼ 725 (800-2¼)	1340-2¾ 745 (800-2¾)

126°

5601 X 100

6330 X 100

TWR

0.4% UP

521 X 100

26

35

5

MIRL Rwy 8-26, 13-31, and 17-35 **0**