

WAAS CH 77832 W17A	APP CRS 171°	Rwy Ldg TDZE 595 Apt Elev 595
--	------------------------	---


RNAV (GPS) RWY 17

SAN MARCOS RGNL (HYI)

⚠ Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV all Cats and Circling Cat C/D visibility ¼ mile; increase LNAV/VNAV all Cats and LNAV Cat C/D/E visibility ⅓ mile. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3100 direct
CILAK and hold.

ATIS 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER ★ 126.825 (CTAF) 0	GND CON 120.125
------------------------	---------------------------------------	--	---------------------------

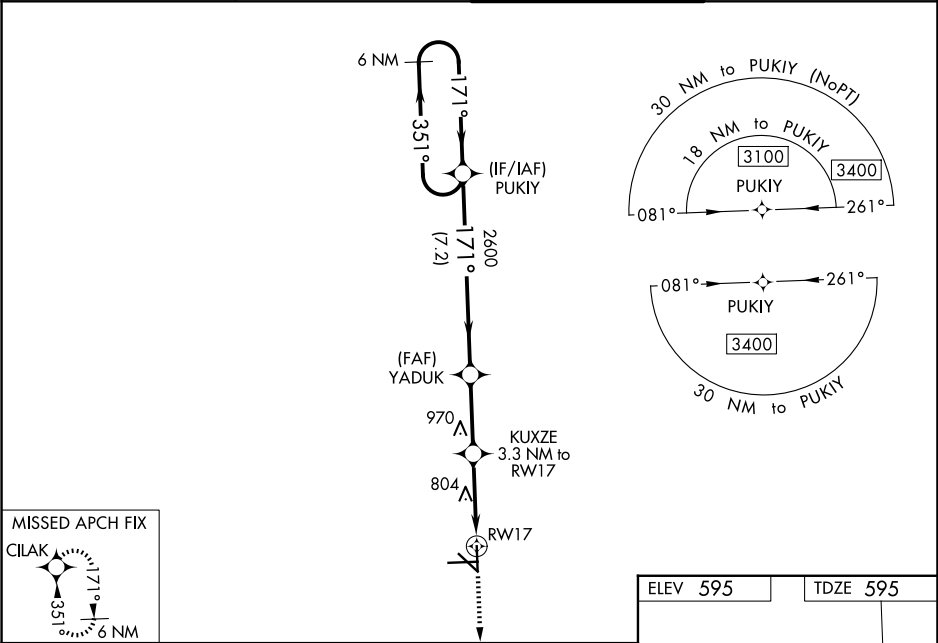

6 NM Holding Pattern		PUKIY		YADUK		KUXZE 3.3 NM to RW17		RW17	
3100		2600		1700		1700		1700	
GP 3.00°		TCH 55		7.2 NM		2.8 NM		2 NM	
CATEGORY		A		B		C		D	
LPV DA				960-1½		365 (400-1½)			
LNAV/VNAV DA				1052-1½		457 (500-1½)			
LNAV MDA		1060-1		465 (500-1)		1060-1¾		465 (500-1¾)	
CIRCLING		1080-1		1120-1		1240-1¾		1320-2¼	
		485 (500-1)		525 (600-1)		645 (700-1¾)		725 (800-2¼)	

