

LOC/DME I-JAC <u>109.1</u> Chan 28	APP CRS 187°	Rwy Ldg 6300 TDZE 6451 Apt Elev 6451
--	------------------------	---

ILS Y or LOC Y RWY 19
JACKSON HOLE (JAC)

RADAR required for procedure entry at MOSSS.

T Circling NA for Cats A, B and C east of Rwy 1-19. Circling NA for
A Cat D. For inop ALS, increase SOSUE fix minimums S-LOC 19 Cats
❄ -21°C C and D visibility to 2½ SM. For inop ALS, increase S-LOC Cat
 C and D visibility to 3 SM.



MALS



MISSED APPROACH: Climb to 14000 on JAC VOR/DME R-192 to KICNE INT/JAC VOR/DME 26.6 DME and hold, continue climb-in-hold to 14000.

D-ATIS	SALT LAKE CENTER	JACKSON TOWER ★	GND CON	UNICOM
120.625	133.25 285.6	118.075 (CTAF) 0	124.55	122.95


MISSED APCH FIX

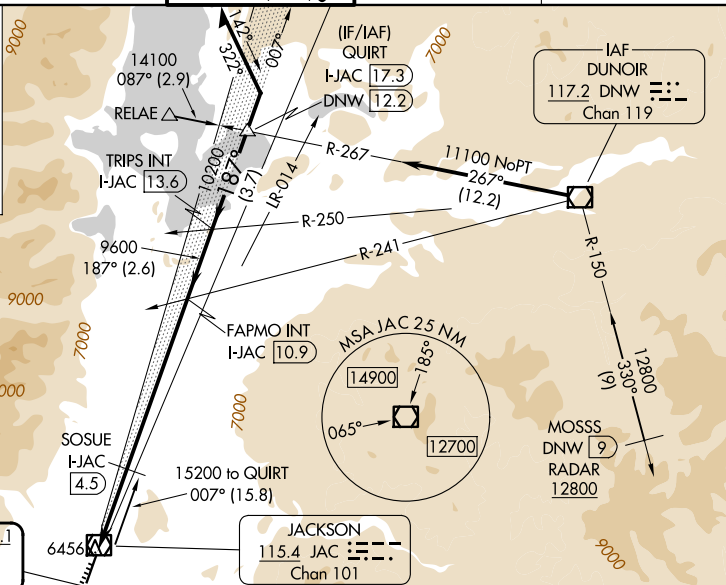

LOCALIZER 109.1
I-JAC : : : :
Chan 28

Use I-JAC DME when on the localizer course.


ELEV 6451	D	TDZE 6451
-----------	----------	-----------

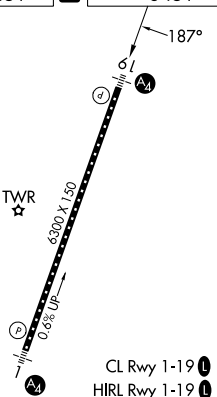

JAC R-192	
-----------	--

DNW (12.2)

within 10 NM

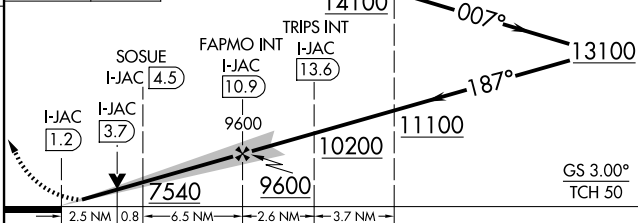

CATEGORY	A	B	C	D
S-ILS 19	7077-1½ 626 (700-1½)			
S-LOC 19	7540/55 1089 (1100-1)	7540-1¼ 1089 (1100-1¼)	7540-2½	1089 (1100-2½)
CIRCLING	7540-1¼ 1089 (1100-1¼)	7540-1½ 1089 (1100-1½)	7540-3 1089 (1100-3)	NA
SOSUE FIX MINIMUMS (DME REQUIRED)				
S-LOC 19	7300/40 849 (900-¾)	7300/55 849 (900-1)	7300-2	849 (900-2)
CIRCLING	7300-1¼	849 (900-1¼)	7400-2¾ 949 (1000-2¾)	NA