


ATIS 118.8 273.5	RADAR required	[USN]	Rwy	Knots	60	120	180	240	300	360
DEP CON			3L/3R	(a) V/V(fpm)	325	650	975	1300	1625	1950
125.55 282.325			8	(b) V/V(fpm)	300	600	900	1200	1500	1800
SAN DIEGO RADIO			26	(c) V/V(fpm)	300	600	900	1200	1500	1800
122.6										

- Minimum Climb Rate
- (a) to 1700
 - (b) to 1900
 - (c) to 3300

TOP ALTITUDE:
ASSIGNED BY ATC

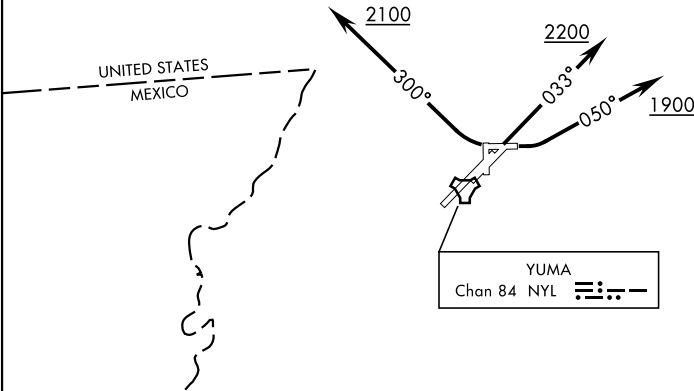

YUMA
Chan 84 NYL



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 3L/3R: Climb on heading 033° to 2200 thence...

TAKEOFF RWY 8: Climbing left turn heading 050° to 1900 thence...

TAKEOFF RWY 26: Climbing right turn heading 300° to 2100 thence...

...expect RADAR vectors to first enroute navaid/fix. Expect clearance to requested altitude/flight level ten minutes after departure.

SW-4, 22 JAN 2026 to 19 FEB 2026

SW-4, 22 JAN 2026 to 19 FEB 2026