



ILS or LOC RWY 13

LOC I-OVI <u>110.35</u>	APCH CRS 128°	Rwy Idg 8194 TDZE 4294 Arpt Elev 4295	[USAF]	CANNON AFB (KCVS)	
RADAR or DME required. Missed approach requires use of RNAV or RADAR monitoring. ▼ * When ALS inop, increase vis to ¾ mile. ** When ALS inop, increase CAT AB vis to 1 mile; CAT CDE vis to 1½ miles.			SSALR 	MISSED APPROACH: Climb to 6000 out CVS TACAN R-1305.6 DME (HOMEP) then climbing right turn to 7000 intercept CVS R-193 to 12 DME (CLINK) and hold.	
ATIS 119.1 269.9	CANNON APP CON 118.425 352.1	CANNON TOWER 120.4 270.25	GND CON 121.9 275.8	CLNC DEL 120.2 293.225	

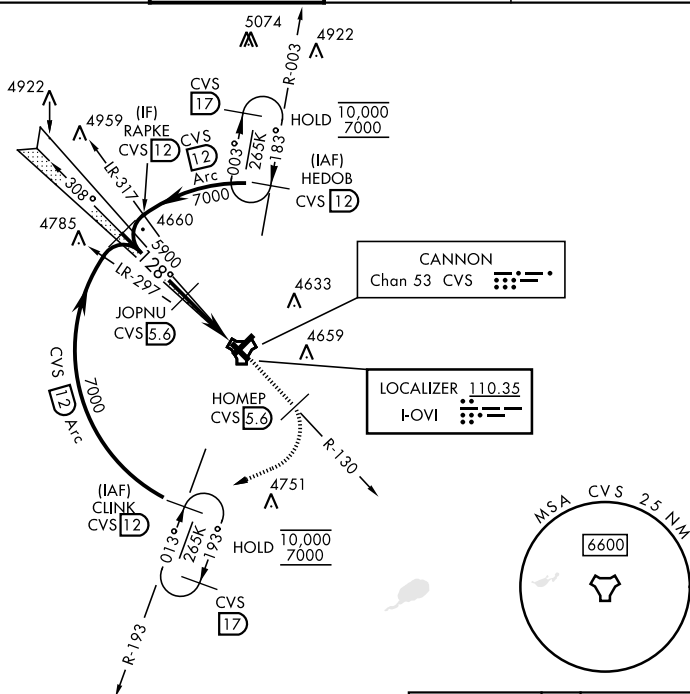

EMERG SAFE ALT 100 NM 8000

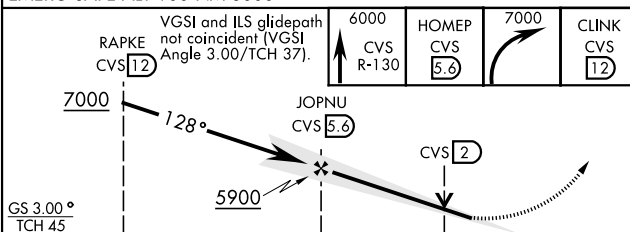

CATEGORY	A	B	C	D	E
S-ILS 13 *	4544-½		250	(300-½)	
S-LOC 13 **	4760-½ 466 (500-½)		4760-1 466 (500-1)		
CIRCLING	4840-1		4860-1½	5000-2¼	5020-2½
	545 (600-1)		565(600-1½)	705(800-2¼)	725(800-2½)