

CLOVIS, NEW MEXICO

RNAV (GPS) RWY 4

WAAS CH 41172 W04A	APCH CRS 038°	Rwy Idg TDZE Arpt Elev	10,001 4284 4295
--------------------------	------------------	------------------------------	------------------------


(USAF)


CANNON AFB (KCVS)

▼ * When ALS inop, increase RVR to 40, vis to 3/4 mile. ** When ALS inop increase RVR to 60 vis to 1 1/8 miles. *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE RVR to 60, vis to 1 1/8 miles.	ALSIF-1 	MISSED APPROACH: Climb to 7000 direct FETEP, then track to HEKDI and hold.
---	--	---

ATIS 119.1 269.9	CANNON APP CON 118.425 352.1	TOWER 120.4 270.25	GND CON 121.9 275.8	CLNC DEL 120.2 293.225
---------------------	---------------------------------	-----------------------	------------------------	---------------------------

DME/DME RNP-0.3 NA
For uncompensated Baro-VNAV systems,
Procedure NA below
7°C (45°F) or above
54°C (130°F).

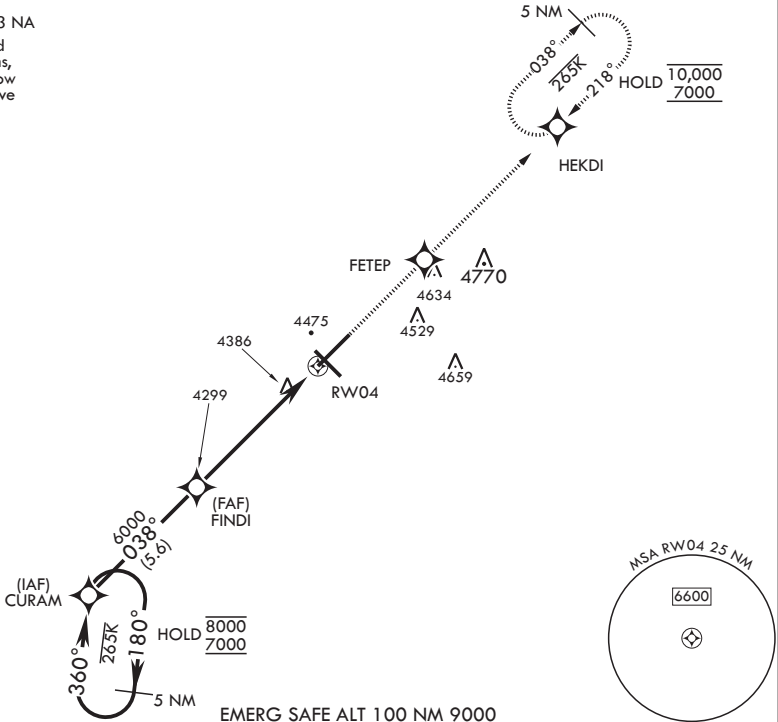

5 NM Holding Pattern CURAM		VGSi and RNAV glidepath not coincident (VGSi angle 2.50/TCH 41°).		7000	FETEP	ELEV 4295	TDZE 4284
8000 7000		180° 360°		038°			
GP 2.50° TCH 46		FINDI		6000			
		1.4 NM to RW04		RW04			
		6.3 NM					
CATEGORY	A	B	C	D	E		
LPV DA*	4484/24		200		(200-1/2)		
LNAV/VNAV DA**	4700/40		416		(500-3/4)		
LNAV MDA***	4700/24 416 (500-1/2)		4700/40 416 (500-3/4)				
CIRCLING	4840-1 545 (600-1)		4840-1 1/2 545 (600-1/2)		4980-2 1/4 685 (700-2/4)	5020-2 1/2 725 (800-2/2)	HIRL all rwys

CLOVIS, NEW MEXICO

34°23'N - 103°19'W

CANNON AFB (KCVS)

Amdt 3 07OCT21

RNAV (GPS) RWY 4

SW-1, 22 JAN 2026 to 19 FEB 2026

SW-1, 22 JAN 2026 to 19 FEB 2026