

LOC/DME I-EVV 109.9 Chan 36	APP CRS 221°	Rwy Ldg TDZE 422 Apt Elev 422
---	------------------------	---

ILS or LOC RWY 22
EVANSVILLE RGNL (E V V)

RADAR or DME required for procedure entry at AUGUS.


⚠


Circling Rwy 9 NA at night. For inop ALS, increase S-LOC 22 Cats C and D visibility to 1¾ SM. DME minimums: For inop ALS, increase S-LOC 22 Cats C and D visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 2500 direct PXV VORTAC and hold.

ATIS 120.2	EVANSVILLE APP CON ★ 124.025 290.9	EVANSVILLE TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	---	-------------------------	-------------------------

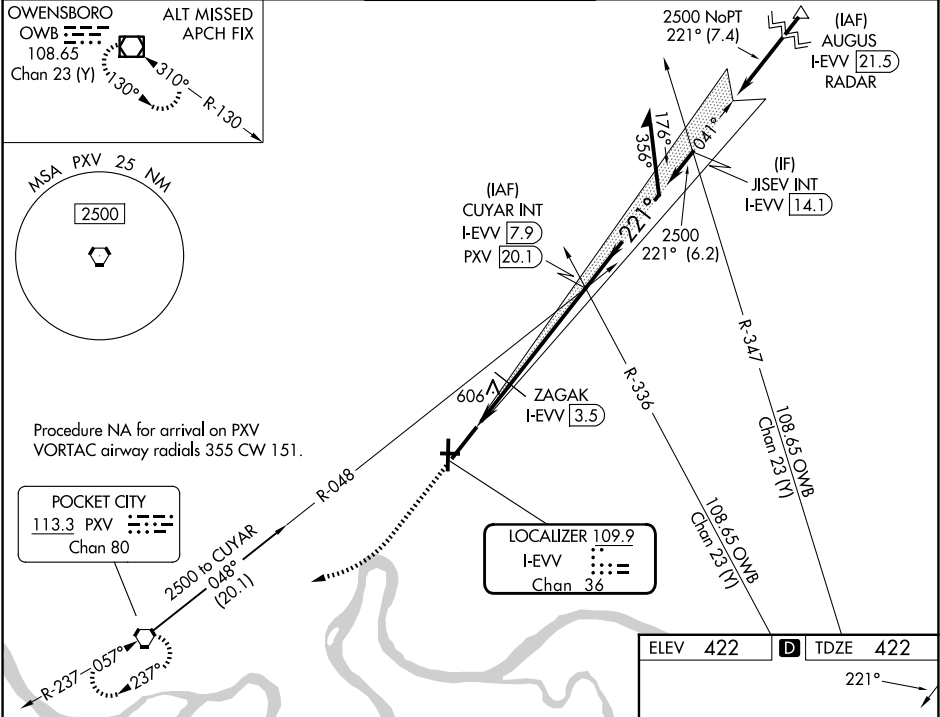

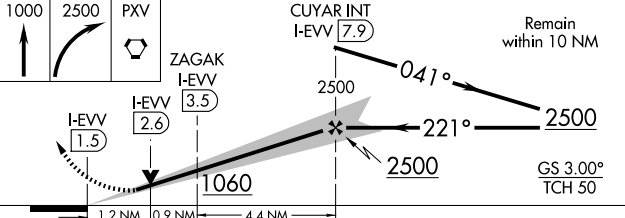1000 ↑	2500 ↗	PXV 				
CUYAR INT I-EVV 7.9						
I-EVV 1.5		I-EVV 2.6	ZAGAK I-EVV 3.5	2500	041°	Remain within 10 NM
1060				2500	221°	2500
				2500	GS 3.00° TCH 50	
CATEGORY	A		B		C	D
S-ILS 22 *	622/24		200 (200-½)			
S-LOC 22	1060/24	638 (700-½)	1060-1¾		638 (700-1¾)	
CIRCLING	1060-1	638 (700-1)	1060-1¾ 638 (700-1¾)		1060-2 638 (700-2)	
ZAGAK FIX MINIMUMS (DME REQUIRED)						
S-LOC 22	840/24	418 (500-½)	840/40		418 (500-¾)	
CIRCLING	920-1 498 (500-1)	1040-1 618 (700-1)	1040-1¾ 618 (700-1¾)		1040-2 618 (700-2)	

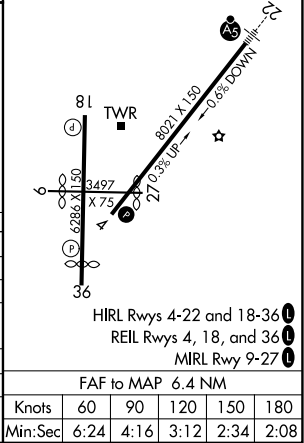

EC-2, 22 JAN 2026 to 19 FEB 2026

EC-2, 22 JAN 2026 to 19 FEB 2026