

WAAS CH 42512 W22A	APP CRS 221°	Rwy Ldg TDZE 422 Apt Elev 422
--	------------------------	---

RNAV (GPS) RWY 22

EVANSVILLE RGNL (EVV)

ASR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling Rwy 9 NA at night.
** RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:

Climb to 2500 direct ICINU and hold.

ATIS 120.2	EVANSVILLE APP CON ★ 124.025 290.9	EVANSVILLE TOWER ★ 118.7(CTAF) 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------

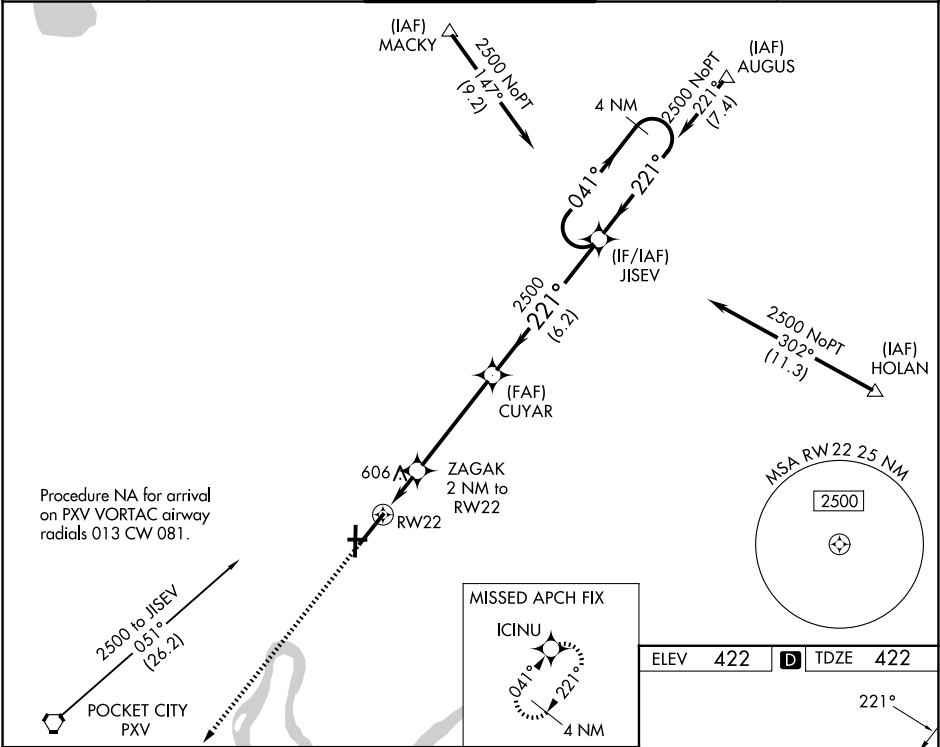

2500 ↑ ICINU	ZAGAK 2 NM to RW22		CUYAR 2500	JISEV	4 NM Holding Pattern
*LNAV only	*1.2 NM to RW22	*1100	221°	041°	2500
	RW22		2500	←221°	GP 3.00° TCH 50
	1.2 NM	0.8	4.4 NM	6.2 NM	
CATEGORY	A	B	C	D	
LPV DA	**622/24		200 (200-½)		
LNAV/ VNAV DA	840/45		418 (500-¾)		
LNAV MDA	860/24	438 (500-½)	860/40	438 (500-¾)	
CIRCLING	920-1 498 (500-1)	1040-1 618 (700-1)	1040-1¾ 618 (700-1¾)	1040-2 618 (700-2)	

ELEV 422

TDZE 422

221°

2500

GP 3.00°

TCH 50

81

TWR

3497

4286

36

27

0.3% UP

0.6% DOWN

8021 x 100

HIRL Rwy 4-22 and 18-36

REIL Rwy 4, 18, and 36

MIRL Rwy 9-27