

WAAS CH 65713 W23B	APP CRS 234°	Rwy Ldg 7500 TDZE 435 Apt Elev 435
--	------------------------	---

RNAV (GPS) Y RWY 23L

RALEIGH-DURHAM INTL (RDU)

RNP APCH-GPS.

T Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C.


A Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV Cat C/D visibility to 1 3/8 SM.

MALSR



MISSED APPROACH:
Climb to 1100 then
climbing left turn to
2600 direct ZEBUL
and hold.

D-ATIS 123.8	RALEIGH APP CON 127.675 307.9	RALEIGH TOWER 127.45 257.8	GND CON 121.9 348.6	CLNC DEL 120.1	CPDLC
-----------------	----------------------------------	-------------------------------	------------------------	-------------------	-------

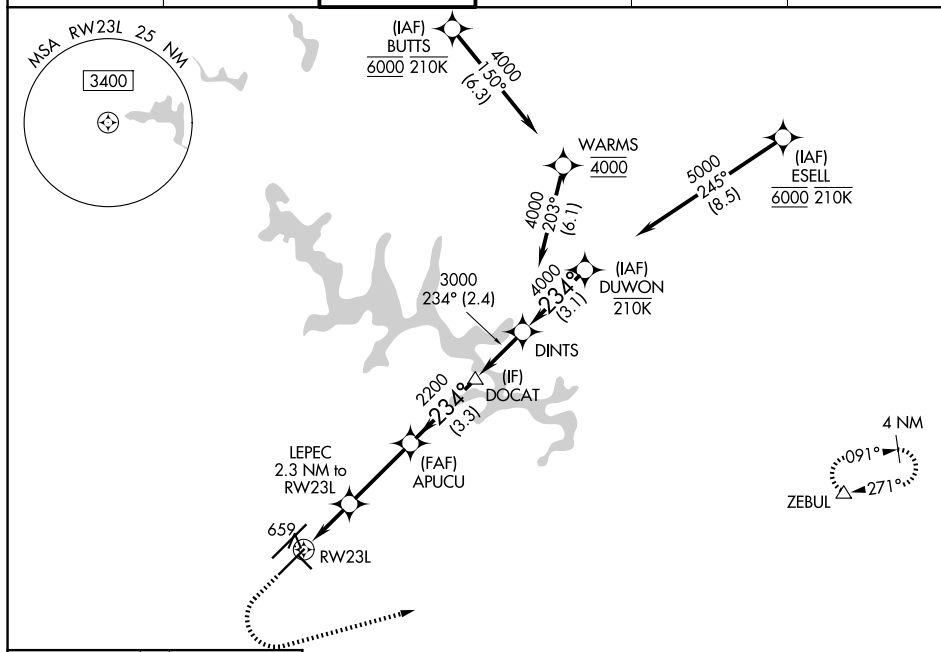

ILS Data Table:

Category	Frequency	Localizer Frequency	Glideslope Frequency	Identifier	Type
A	111.00	111.00	111.00	435	ILS
B	111.00	111.00	111.00	435	CAT II
C	111.00	111.00	111.00	435	CAT III