

LOC/DME I-BPT	APP CRS	Rwy Idg	6508
110.15	120°	TDZE	15
Chan 38(Y)		Apt Elev	15

ILS or LOC RWY 12

JACK BROOKS RGNL (BPT')

DME or RADAR required.

- ▼ Helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to S-ILS 12.

▲ When local altimeter setting not received use Orange County altimeter setting: increase S-ILS 12 DA to 297 feet; increase all MDAs 40 feet. COUGS fix minimums: increase S-LOC 12 visibility Cat C/D/E to RVR 5000. For inop ALS, increase S-LOC visibility Cat A to RVR 5500 and Cat C/D/E to 2½ SM. COUGS fix minimums: increase S-LOC visibility Cat A/B to RVR 5500 and Cat E to 1½ SM. For inop ALS when using Orange County altimeter setting, increase S-ILS 12 all Cats visibility to RVR 4500, S-LOC 12 visibility Cat A to RVR 5500 and Cat C/D/E to 2½ SM. COUGS fix minimums: increase S-LOC 12 visibility Cat A/B to RVR 5500 and Cat C/D/E to 1½ SM. VDP NA when using Orange County altimeter setting.


*RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Orange County altimeter setting.

MALS




MISSED APPROACH:
Climb to 500 then
climbing right turn to
3000 direct SBI
VOR/DME and hold.

ATIS	HOUSTON APP CON	BEAUMONT TOWER*	GND CON	CLNC DEL	UNICOM
126.3	121.3 377.1	119.5 (CTAF) 0	124.85	118.3	122.95

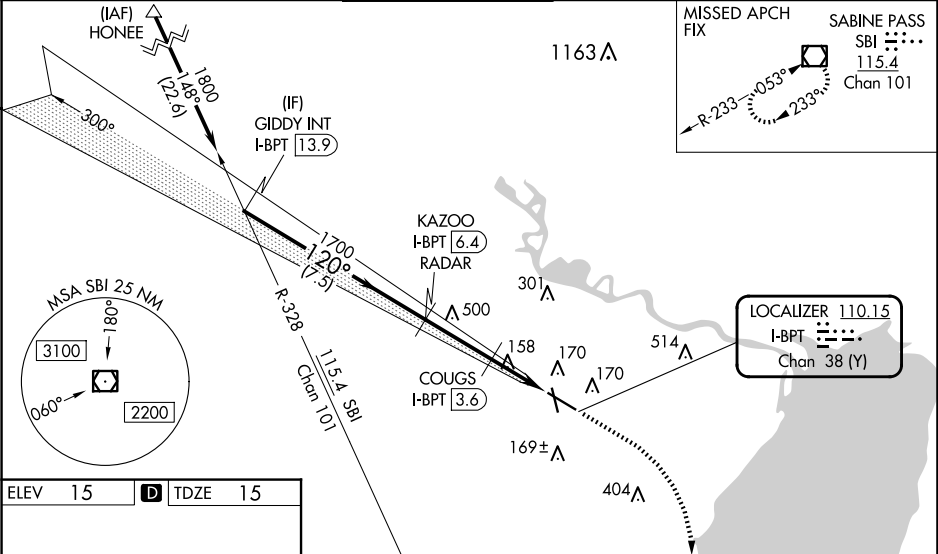

ELEV	15	D	TDZE	15
------	----	---	------	----

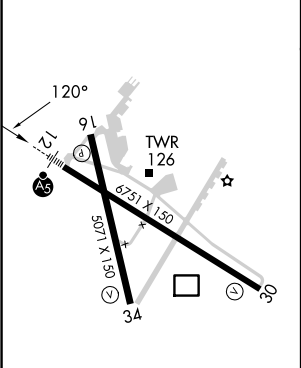

REIL Rwys 16, 30 and 34					
HIRL Rwys 12-30, 16-34					
FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

BEAUMONT/PORT ARTHUR, TEXAS
Amdt 24 25JAN24

29°57'N-94°01'W

JACK BROOKS RGNL (BPT')

ILS or LOC RWY 12

SC-5, 22 JAN 2026 to 19 FEB 2026