

WAAS CH 62829 W18A	APP CRS 175°	Rwy Ldg TDZE 492 Apt Elev 542
--	------------------------	---

RNAV (GPS) Y RWY 18L

AUSTIN-BERGSTROM INTL (AUS)


RNP APCH-GPS.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. Use of FD or AP required during simultaneous operations. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV visibility all Cats to RVR 6000, and LNAV visibility Cats C, D, and E to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct HOOKK and hold.

D-ATIS 124.4	AUSTIN APP CON 127.225 317.65 (E) 120.875 270.25 (S) 119.0 370.85 (W)	AUSTIN TOWER 121.0 281.5	GND CON 121.9 348.6
------------------------	---	------------------------------------	-------------------------------

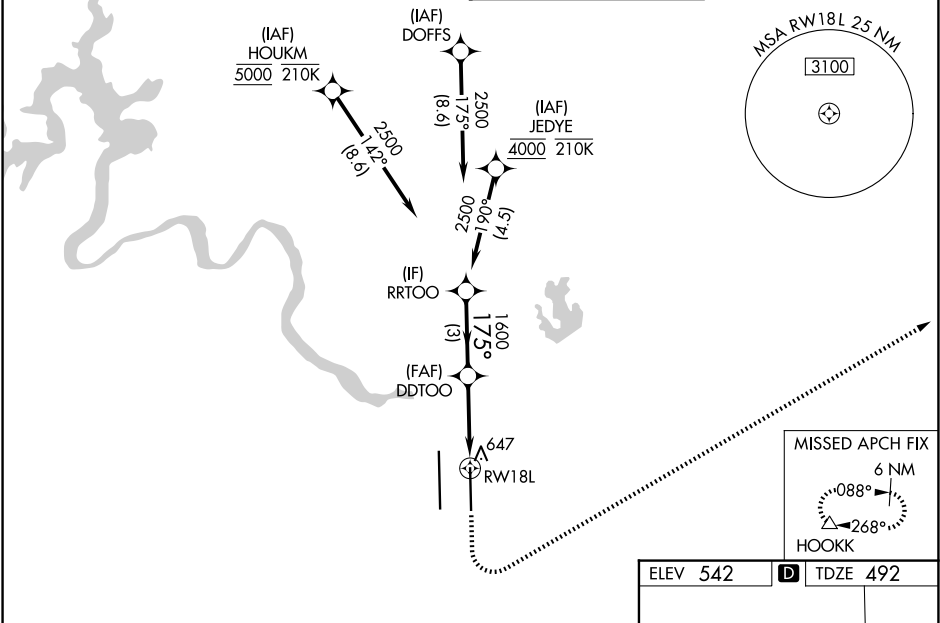

RRTOO		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).		1000	3000	HOOKK
2500		17.5°		1600		1.1 NM to RWY18L
GP 3.00°		TCH 61		3 NM		2.2 NM
CATEGORY	A	B	C	D	E	
LPV DA	692/18		200 (200-½)			
LNAV/VNAV DA	906/40		414 (400-¾)			
LNAV MDA	900/24	408 (400-½)	900/40		408 (400-¾)	
CIRCLING	1040-1 498 (500-1)	1120-1 578 (600-1)	1200-1¾ 658 (700-1¾)	1200-2 658 (700-2)	NA	

ELEV 542

TDZE 492

18R

17.5°

18L

9000 X 150

36R

36L

TWR

0.6% DOWN

0.3% UP

12250 X 150

HIRL Rwy 18L-36R and 18R-36L
TDZL/RCLS Rwy 18L and 36R