

APP CRS
101°

Rwy Ldg
11492

TDZE
1135

Apt Elev
1203

RNAV (RNP) Z RWY 10R

PITTSBURGH INTL (PIT')


RNP AR APCH - GPS. Authorization required.

For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C. For inop ALS, increase RNP 0.14 all Cats visibility to RVR 5500, and RNP 0.30 all Cats visibility to 1½ SM. Simultaneous approach authorized.

ALSF-2

MISSED APPROACH: Climb to 4000 on track 101° to KADEC and on track 143° to JAPAV and on track 198° to GUZIT and hold.

D-ATIS ARR 127.25 DEP 135.9	PITTSBURGH APP CON 123.95 360.8	PITTSBURGH TOWER 128.3 291.7	GND CON SOUTH 121.9 348.6 NORTH 127.8 348.6	CLNC DEL 126.75 353.7
---	---	--	---	---------------------------------

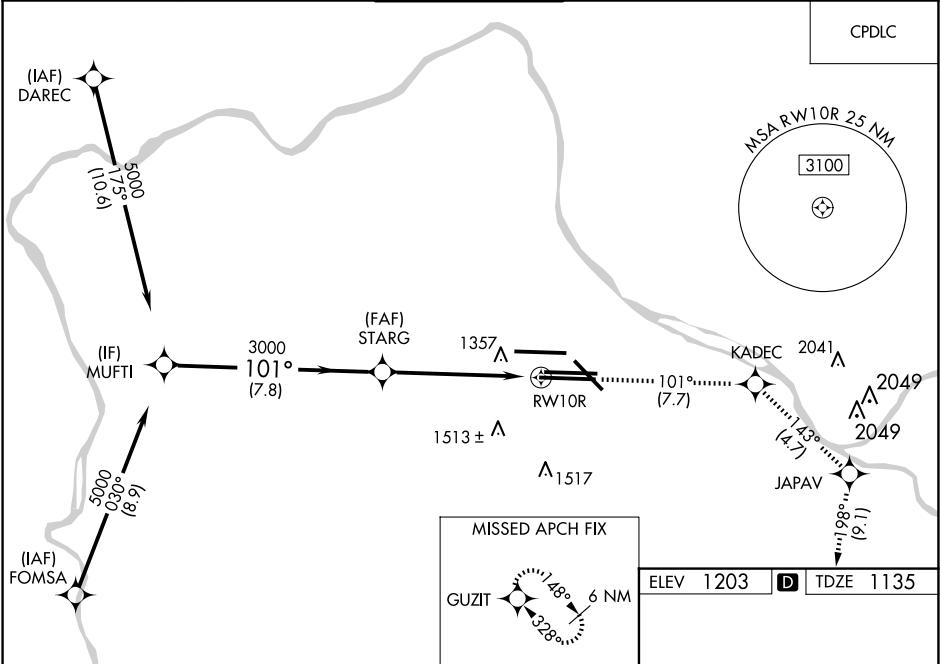

MUFTI
5000
GP 3.00°
TCH 51

4000
↑
tr 101°

KADEC
tr 143°

JAPAV
tr 198°

GUZIT

3000

STARG
3000

RW10R

7.8 NM

5.7 NM

CATEGORY	A	B	C	D
RNP 0.14 DA		1511/35	376 (400-½%)	
RNP 0.20 DA		1572/40	437 (400-¾%)	
RNP 0.30 DA		1697-1¼	562 (500-1¼)	

AUTHORIZATION REQUIRED

REIL Rwy 10C
HIRL all Rwys
TDZ/CL Rwys 10L, 10R, 28L, 28R,
28C, and 32