
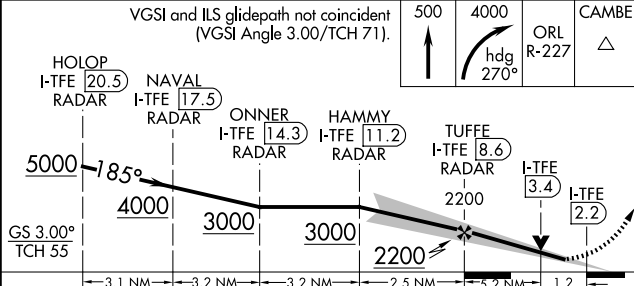


LOC/DME I-TFE	APP CRS	Rwy Ldg
111.9	185°	12004
Chan 56		TDZE 94
		Apt Elev 96


ILS or LOC RWY 18R
ORLANDO INTL (MCO)

DME or RADAR required. RNP APCH-GPS. From YAGGO.	MALSR	MISSED APPROACH: Climb to 500 then climbing right turn to 4000 on heading 270° and on ORL VORTAC R-227 to CAMBE INT/ORL 20 DME and hold, continue climb-in-hold to 4000.
Simultaneous approach authorized.		

D-ATIS 121.25	ORLANDO APP CON 124.8 307.0	ORLANDO TOWER 118.45 253.5 (17L/35R, 17R/35L) 124.3 253.5 (18L/36R, 18R/36L)	GND CON 126.4 (E) 121.8 (W)
-------------------------	---------------------------------------	--	---

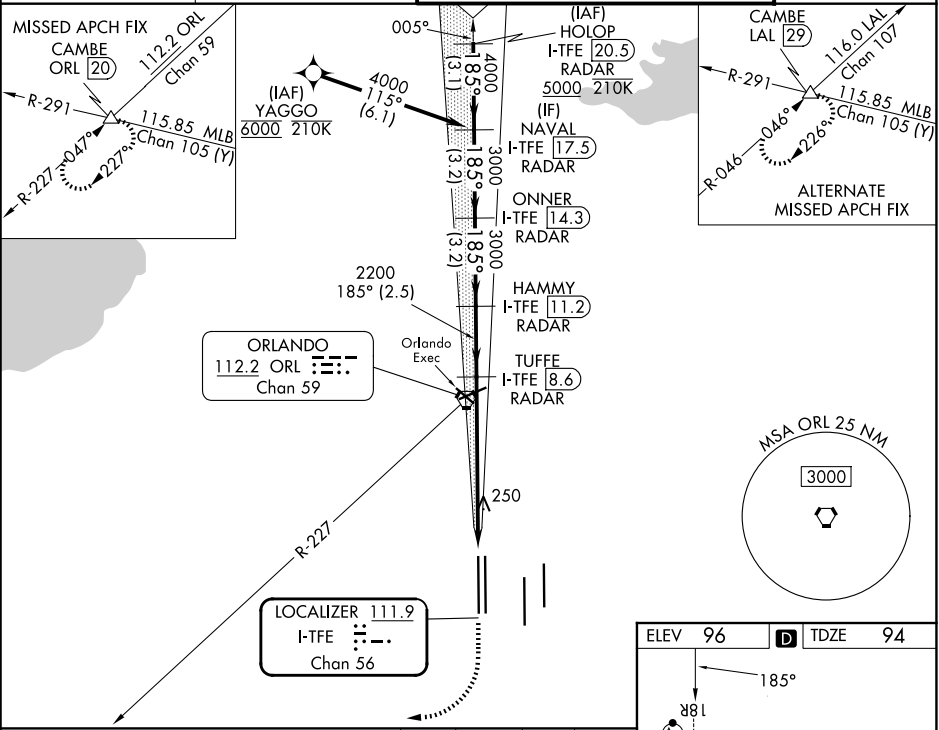

CATEGORY	A	B	C	D
S-ILS 18R	294/18	200 (200-1/2)		
S-LOC 18R	540/24	446 (500-1/2)	540/45	446 (500-7/8)
CIRCLING	740-1	644 (700-1)	740-1 3/4	740-2

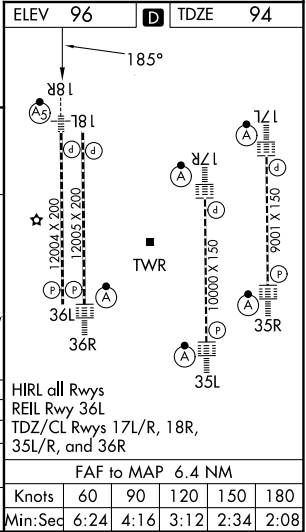

SE-3, 22 JAN 2026 to 19 FEB 2026

SE-3, 22 JAN 2026 to 19 FEB 2026