


WAAS CH 49217 W01A	APP CRS 003°	Rwy Idg 5000 TDZE 372 Apt Elev 372
--	------------------------	---

RNAV (GPS) RWY 1
STURGIS MUNI (TWT)


Baro-VNAV NA when using Henderson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Henderson altimeter setting and increase LPV DA to 708 and visibility all Cats to 1 ½ miles; increase LNAV/VNAV DA to 780 feet and visibility all Cats to 1 ¾ miles; increase all MDA 60 feet and Circling Cat C visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2500 direct
OLGEW and hold.

AWOS-3 118.775	EVANSVILLE APP CON ★ 124.025 290.9	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

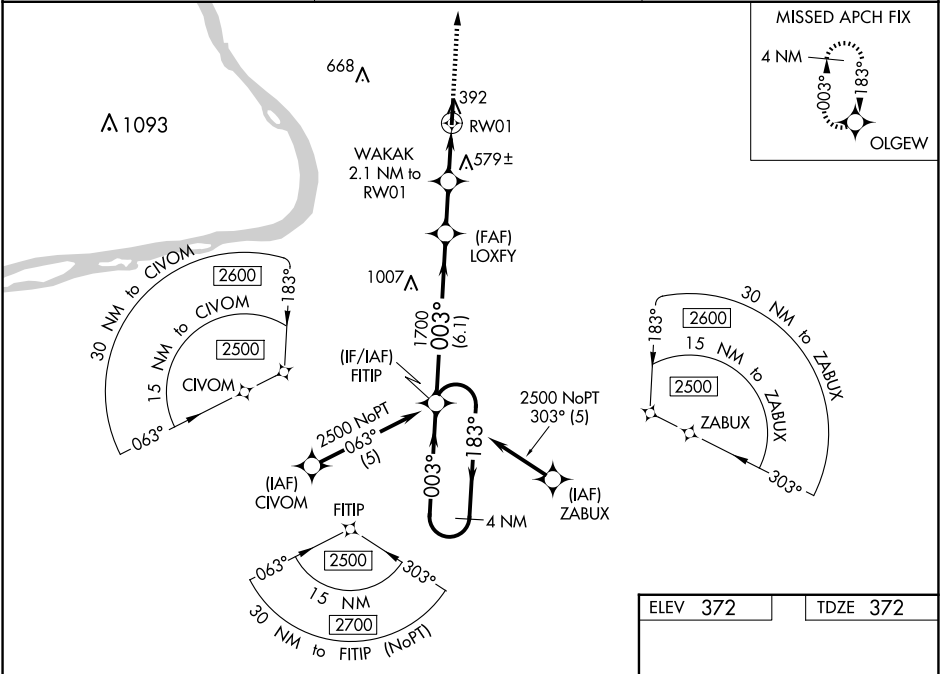

4 NM Holding Pattern		FITIP		LOXFY		WAKAK 2.1 NM to RW01		RW01	
2500		183°		003°		1700		*1080	
GP 3.00° TCH 45		6.1 NM		1.9 NM		2.1 NM		2500 OLGEW	
CATEGORY		A		B		C		D	
LPV DA		658-7/8		286 (300-7/8)					
LNAV/VNAV DA		730-1 1/4		358 (400-1 1/4)					
LNAV MDA		820-1 448 (500-1)		820-1 3/8 448 (500-1 3/8)					
CIRCLING		860-1 488 (500-1)		1000-1 628 (700-1)		1000-1 3/4 628 (700-1 3/4)		1120-2 1/2 748 (800-2 1/2)	

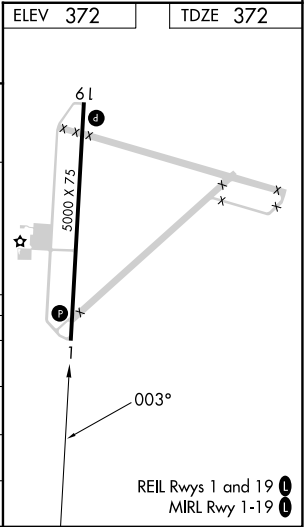

SE-1, 22 JAN 2026 to 19 FEB 2026

SE-1, 22 JAN 2026 to 19 FEB 2026