
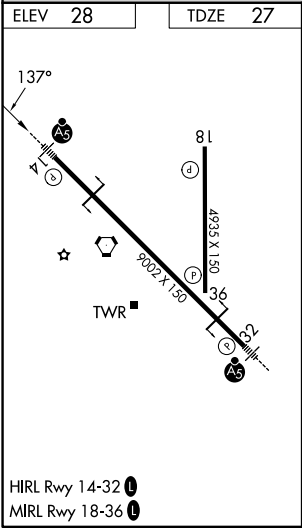


WAAS CH 97301 W14A	APP CRS 137°	Rwy Ldg TDZE 27 Apt Elev 28
--	------------------------	---

RNAV (GPS) RWY 14
GULFPORT-BILOXI INTL (GPT)

RNP APCH.	MALSR	MISSED APPROACH: Climb to 2800 direct IVOLE and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500. **RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 119.45	GULFPORT APP CON ★ 127.5 254.25	GULFPORT TOWER ★ 123.7 (CTAF) 0 339.8	GND CON 120.4 348.6	UNICOM 122.95
-----------------------	---	---	-------------------------------	-------------------------

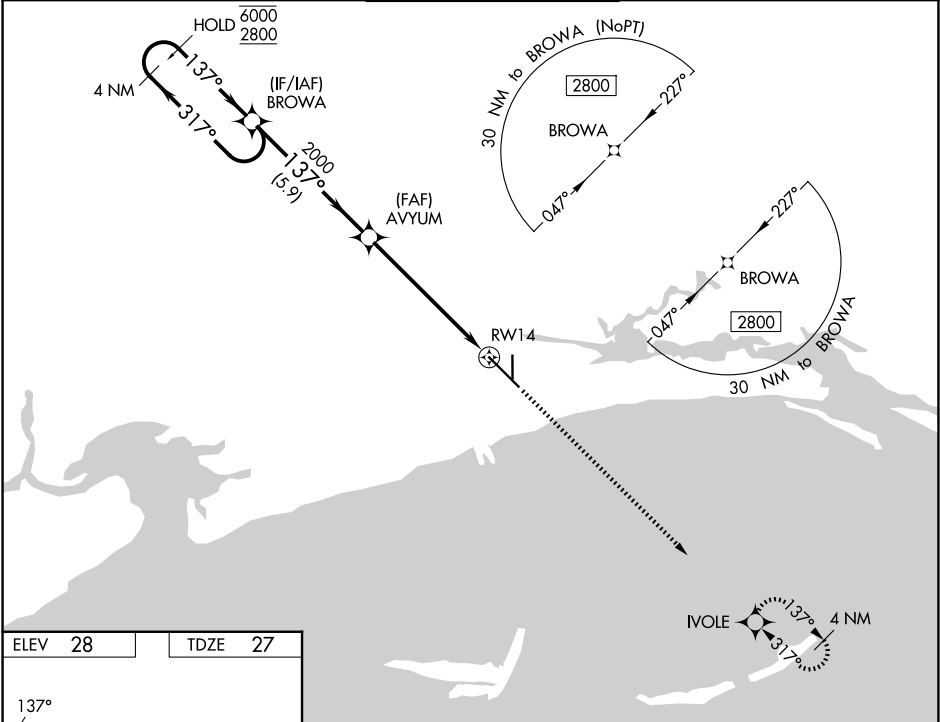

4 NM Holding Pattern				VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).	2800	IVOLE
BROWA				AVYUM		
6000 ← 317°				2000	*1.5 NM to RW14	*LNAV only.
2800				2000		
GP 3.00° TCH 50				5.9 NM	4.6 NM	1.5 NM
CATEGORY	A	B	C	D		
LPV DA**		227/24	200 (200-½)			
LNAV/VNAV DA		404/35	377 (400-⅝)			
LNAV MDA	580/24	553 (600-½)	580/60	553 (600-1¼)		
CIRCLING	580-1 552 (600-1)	640-1 612 (700-1)	820-2¼ 792 (800-2¼)	820-2½ 792 (800-2½)		

SC-4, 22 JAN 2026 to 19 FEB 2026

SC-4, 22 JAN 2026 to 19 FEB 2026