

WAAS CH 87116 W20A	APP CRS 205°	Rwy Idg TDZE Apt Elev	5600 568 571
--	------------------------	-----------------------------	---



RNAV (GPS) RWY 20
DANVILLE RGNL (DAN)

RNP APCH.

Baro-VNAV NA when using Roxboro, NC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. When local altimeter setting not received, use Roxboro, NC altimeter setting and increase all DA 62 feet and all MDA 80 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ mile and LNAV Cats C and D ¼ mile. VDP NA with Roxboro, NC altimeter setting.

MISSED APPROACH: Climb to 2500 direct LANTA and hold.

ASOS 128.125	WASHINGTON CENTER 124.05 352.0	UNICOM 123.05 (CTAF) 0
------------------------	--	----------------------------------

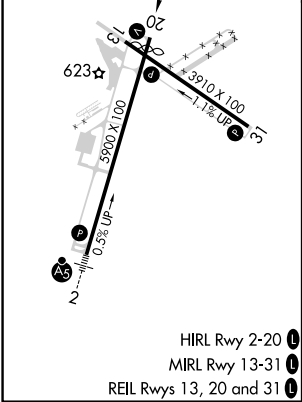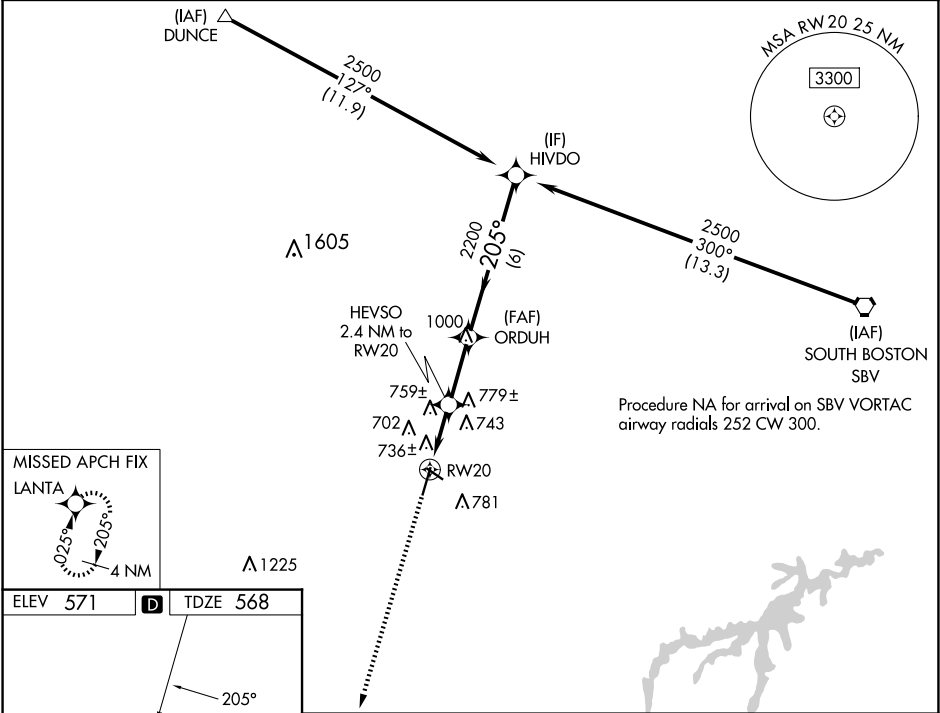

2500 ↑	LANTA ✦				
*LNAV only.		HEVSO 2.4 NM to RW20	ORDUH 2200	HIVDO 2500	2500
RW20 1.3 NM		1.3 NM to RW20	1380*	205°	2200
1.1 NM		2.5 NM	6 NM	Procedure Turn NA	
GP 3.00°		TCH 50			
CATEGORY	A	B	C	D	
LPV DA	768-1 200 (200-1)				
LNAV/VNAV DA	1026-1½ 458 (500-1½)				
LNAV MDA	1020-1	452 (500-1)	1020-1¼ 452 (500-1¼)	1020-1½ 452 (500-1½)	

NE-3, 22 JAN 2026 to 19 FEB 2026

NE-3, 22 JAN 2026 to 19 FEB 2026