


WAAS CH 50408 W17A	APP CRS 175°	Rwy Ldg TDZE Apt Elev	7201 1004 1009
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 17
PONCA CITY RGNL (PNC)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 2700 direct ZULOT and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS increase LPV visibility all Cats to ½ SM.		

ASOS 134.075	KANSAS CITY CENTER 127.8 319.1	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

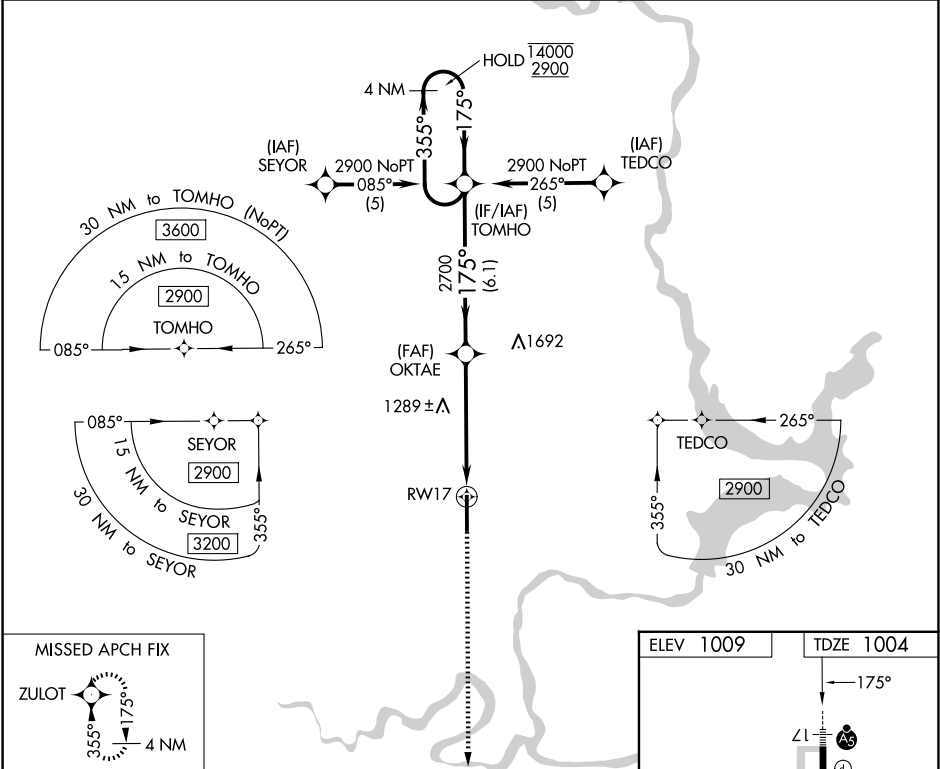

4 NM Holding Pattern				TOMHO		OKTAE 2700		1.6 NM to RW17		RW17	
14000 2900				←355° 175°→		175°		2700		2700	
GP 3.00° TCH 48											
				6.1 NM		3.6 NM		1.6 NM			
CATEGORY		A		B		C		D			
LPV DA				1279-½		275 (300-½)					
LNAV/ VNAV DA				1330-½		326 (400-½)					
LNAV MDA		1540-½		536 (600-½)		1540-1		536 (600-1)			
CIRCLING		1540-1 531 (600-1)		1580-1 571 (600-1)		1800-2¼ 791 (800-2¼)		1880-2¾ 871 (900-2¾)			

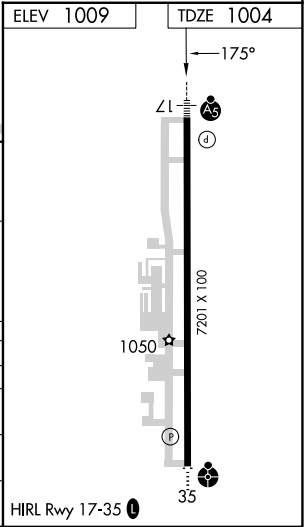

SC-1, 22 JAN 2026 to 19 FEB 2026

SC-1, 22 JAN 2026 to 19 FEB 2026