

WAAS CH 93808 W35A	APP CRS 355°	Rwy Ldg TDZE Apt Elev	7201 1008 1009
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35
PONCA CITY RGNL (PNC)


RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using WLD altimeter setting. When local altimeter setting not received, use WLD altimeter setting and increase LPV DA to 1377 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1560 feet and all visibilities ⅓ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ⅓ SM, and Circling visibility Cat C/D ½ SM.

ODALS

MISSED APPROACH:
Climb to 2800 direct
TOMHO and hold.

ASOS 134.075	KANSAS CITY CENTER 127.8 319.1	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

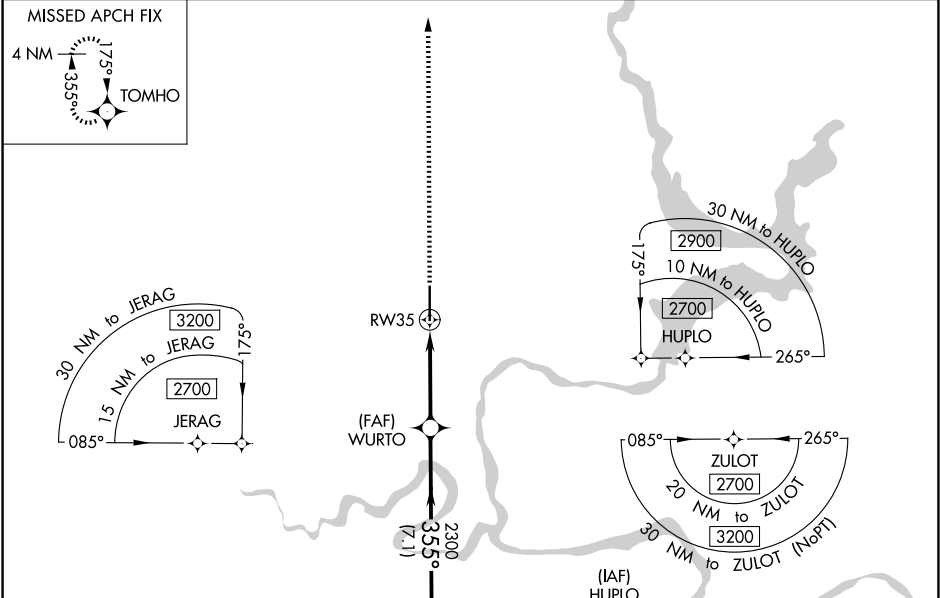

ELEV 1009

TDZE 1008

HIRL Rwy 17-35 0

4 NM

Holding Pattern

6000

2700

GP 3.02°

TCH 46

175°

355°

355°

2300

7.1 NM

2.4 NM

1.5 NM

1.5 NM to RW35

2800

TOMHO

1050

7201 X 100

35

355°

CATEGORY	A	B	C	D
LPV DA		1295-¾	287 (300-¾)	
LNAV/VNAV DA		1478-1¼	470 (500-1¼)	
LNAV MDA	1540-¾	532 (600-¾)	1540-1⅜	532 (600-1⅜)
CIRCLING	1540-1 531 (600-1)	1580-1 571 (600-1)	1800-2¼ 791 (800-2¼)	1880-2¾ 871 (900-2¾)