

WAAS CH 65613 W20A	APP CRS 199°	Rwy Ldg 7003 TDZE 1262 Apt Elev 1268
--	------------------------	---


RNAV (GPS) RWY 20
SPRINGFIELD-BRANSON NTL (SGF)

T DME/DME RNP: 0.3 NA. Visibility reduction by helicopters NA.
A For conventional Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F).
Baro-VNAV and VDP NA when using Monett altimeter setting.
Inoperative table does not apply to LNAV/VNAV all Cats and LNAV Cat C.
When local altimeter setting not received, use Monett altimeter setting and increase all DAs 90 feet and increase all MDAs 100 feet, increase LPV visibility all Cats ¼ mile, increase LNAV/VNAV all Cats ¼ mile, increase LNAV Cats C and D ¼ mile, increase Circling Cat C ¼ mile.

MALS


MISSED APPROACH: Climb to 3000 direct AWAQE and hold.

ATIS 135.125	SPRINGFIELD APP CON 124.95 290.5	SPRINGFIELD TOWER 119.9 257.8	GND CON 121.9 251.15	CLNC DEL 123.675
-----------------	-------------------------------------	----------------------------------	-------------------------	---------------------

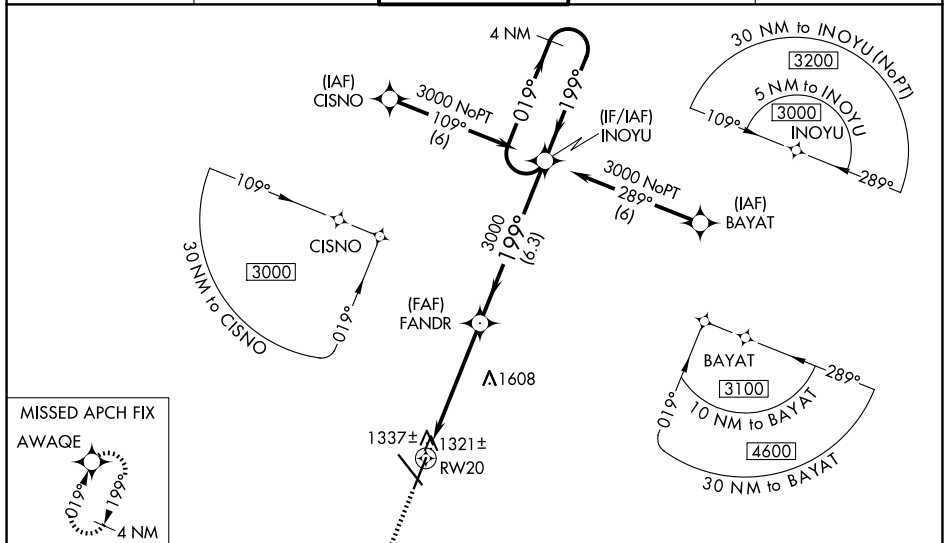


NC-3, 22 JAN 2026 to 19 FEB 2026

ELEV 1268	D	TDZE 1262
-----------	----------	-----------

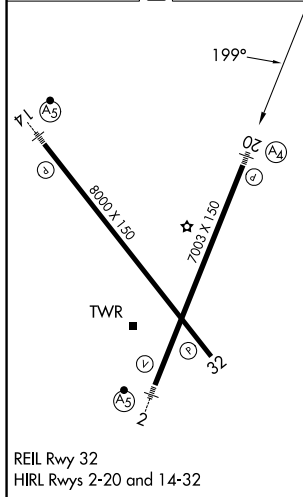

SPRINGFIELD, MISSOURI

Amdt 2B 28MAY15

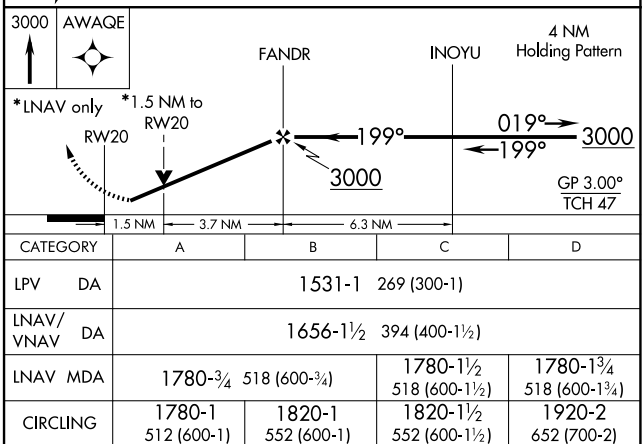

SPRINGFIELD-BRANSON NTL (SGF)

RNAV (GPS) RWY 20

37°15'N-93°23'W