


LOC I-HUF	APP CRS	Rwy Idg	9020
109.7	049°	TDZE	573
		Apt Elev	589

ILS or LOC RWY 5

TERRE HAUTE RGNL (HUF')

ADF or DME required.			
VDP NA when using Paris altimeter setting. When local altimeter setting not received, use Paris altimeter setting and increase all DA 61 feet and all MDA 80 feet, increase S-LOC 5 Cats C/D visibility to RVR 4500. For inop ALS, increase S-LOC 5 Cat C/D visibility to RVR 5500, when using Paris altimeter setting increase S-ILS 5 all Cats visibilities to RVR 4500 and S-LOC Rwy 5 all Cats visibility ½ SM. **RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Paris altimeter setting.		MALSR	MISSED APPROACH: Climb to 2300 direct TTH VORTAC and hold.
ATIS	HULMAN APP CON	HULMAN TOWER	GND CON
127.5 269.375	125.45 339.8	134.725 322.475	121.6 348.6

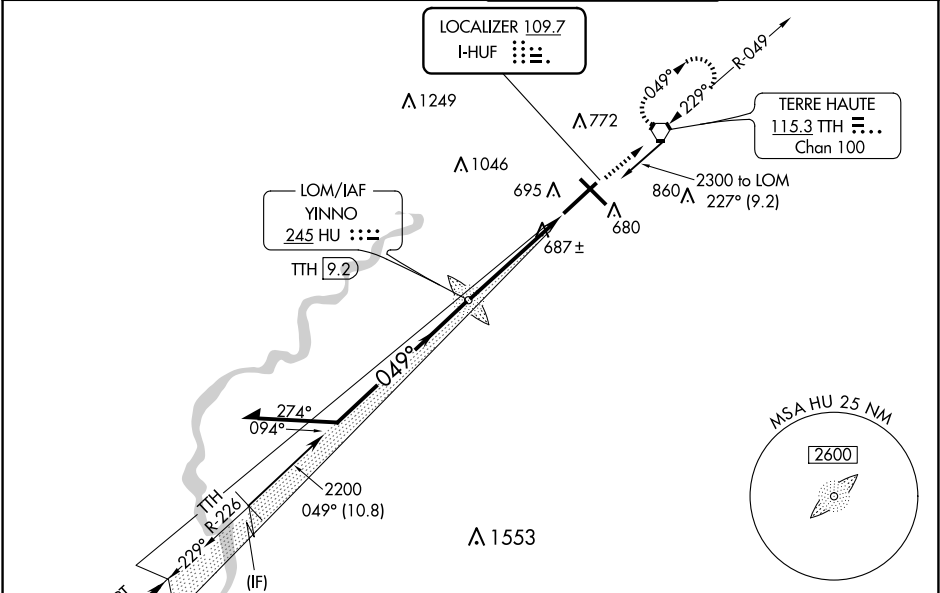

2200 NDB 046° (13.1)
CSUCH TTH 20
(IAF) WORKE BIB 35.2