

APP CRS
197°

Rwy Ldg
TDZE
Apt Elev

6948
-1
4


RNAV (RNP) Z RWY 20
LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

RNP AR APCH - GPS.
▼ For uncompensated Baro-VNAV systems, procedure NA below -1°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 6000.

MALS
A4

MISSED APPROACH: Climb to 2000 on track 197° to POLY and track 109° to SAFES and hold.

D-ATIS 127.55	NEW ORLEANS APP CON 125.5 350.35 (W) 133.15 290.3 (E)	NEW ORLEANS TOWER 119.5 254.3	GND CON 121.9 273.525
-------------------------	---	---	---------------------------------

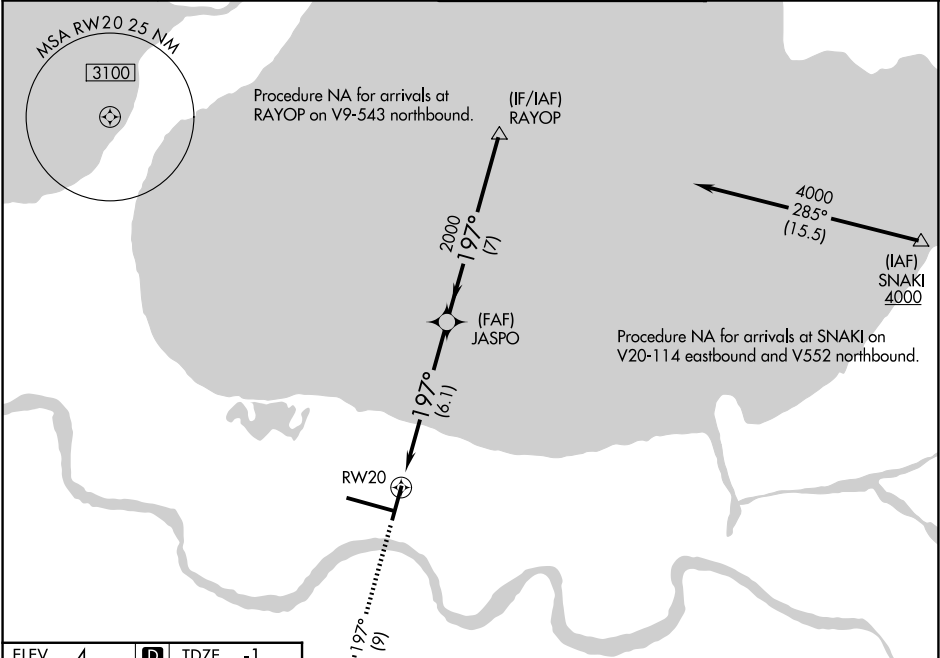

ELEV 4 D TDZE -1

MISSED APCH FIX
SAFES
174°
354°
4 NM

2000	tr 197°	POLY	tr 109°	SAFES
------	---------	------	---------	-------

RAYOP	4000	GP 3.00° TCH 52
JASPO	2000	
RW20		
6.1 NM	7 NM	

CATEGORY	A	B	C	D
RNP 0.11 DA		363/40	364 (400-¾)	
RNP 0.30 DA		414/50	415 (500-1)	

AUTHORIZATION REQUIRED

NEW ORLEANS, LOUISIANA
Amdt 1A 07OCT21

LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)
30°00'N-90°16'W

RNAV (RNP) Z RWY 20