

WAAS CH 49006 W29A	APP CRS 287°	Rwy Ldg 9800 TDZE 2 Apt Elev 3
--	------------------------	---

RNAV (GPS) Y RWY 29

LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

RNP APCH - GPS.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5000 and LNAV Cat C/D visibility to 1³/₈ SM.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR




MISSED APPROACH: Climb to 3000
direct LETSE and on track 291° to
RQR VOR/DME and hold.

D-ATIS 127.55	NEW ORLEANS APP CON 125.5 350.35 (W) 133.15 290.3 (E)	NEW ORLEANS TOWER 119.5 254.3	GND CON 121.9 273.525
------------------	---	----------------------------------	--------------------------

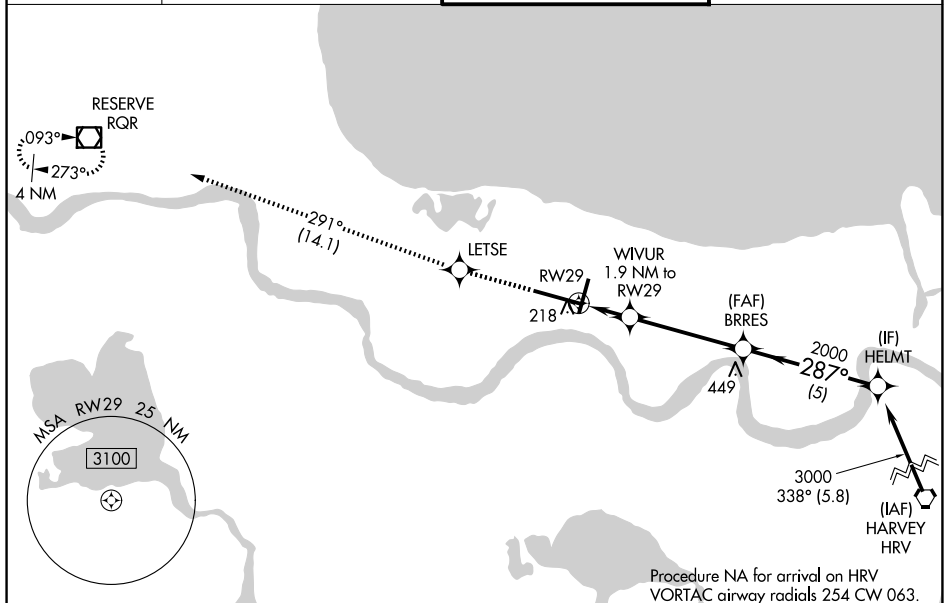

ELEV	3	D	TDZE	2
------	---	----------	------	---

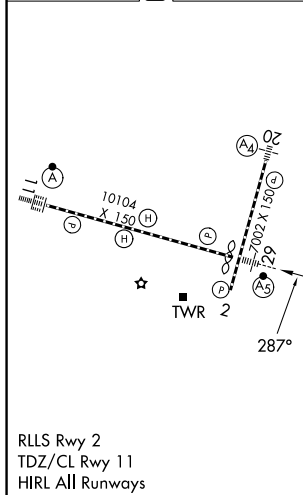

RNAV (GPS) Y RWY 29