

APP CRS
134°

Rwy Ldg
9093
TDZE
13
Apt Elev
13

RNAV (GPS) Z RWY 13L

JOHN F KENNEDY INTL (JFK)


RNP APCH - GPS.
RADAR required.

ALSF-2

MISSED APPROACH: (Do not exceed 210K until DVETO) Climb to 4000 on the extended visual approach track to RW13L, then direct DVETO and track 073° to HIRBO and hold.

For any lead-in light bank out of service, increase visibility to 4 SM.

D-ATIS (NE)			NEW YORK APP CON		KENNEDY TOWER		GND CON
(SW)	115.4	117.7 128.725	128.125	269.0	119.1 281.55	(4R/22L and 13L/31R)	121.9 348.6
					123.9	281.55 (4L/22R and 13R/31L)	

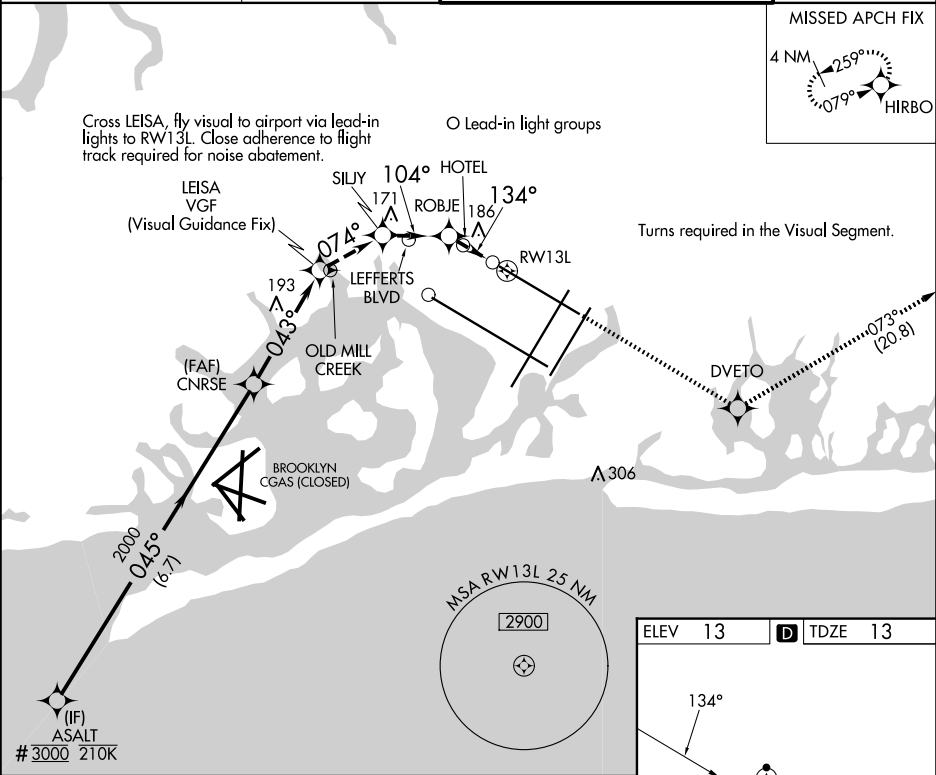

2000 minimum when authorized by ATC.

ASALT

3000

045°

6.7 NM

CNRSE

2000

3.00° TCH 58

043°

2.4 NM

LEISA

SILJY

ROBJE

1.3

1.2

1.2

DVETO

4000

tr 073°

HIRBO

* Check ALT.

CATEGORY	A	B	C	D
LNAV MDA		1260-2	1247 (1300-2)	

ELEV 13

TDZE 13

RLS Rwy 13L and 13R

HIRL all Rwy

TDZ/CL Rwy 4L, 4R, 13L, 22L and 31R