



LOC I- 110.1	APP CRS 280°	Rwy Ldg TDZE 9129 588 Apt Elev 592
---------------------	---------------------	---

ILS Z or LOC Z RWY 28

NIAGARA FALLS INTL (IAG)

ADF required. DME required.	MALSR	MISSED APPROACH: Climb to 1500 then climbing right turn to 3200 on heading 150° and KATHI LOM BRG-100 to DIONE/IAG 12 DME and hold.
⚠ ⚠ Circling Rwy 6 NA at night. Rwy 28 helicopter visibility reduction below RVR 4000 NA. Circling NA for Cat E southeast of Rwy 6-24. Inop table does not apply to S-ILS 28 all Cats. For inop ALS, increase S-LOC 28 visibility Cats A/B RVR 5500, Cats C/D/E 1¾ SM.		

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	UNICOM 122.95
----------------------------	---------------------------------------	---	-------------------------------	-------------------------

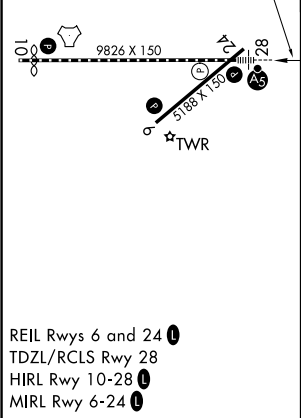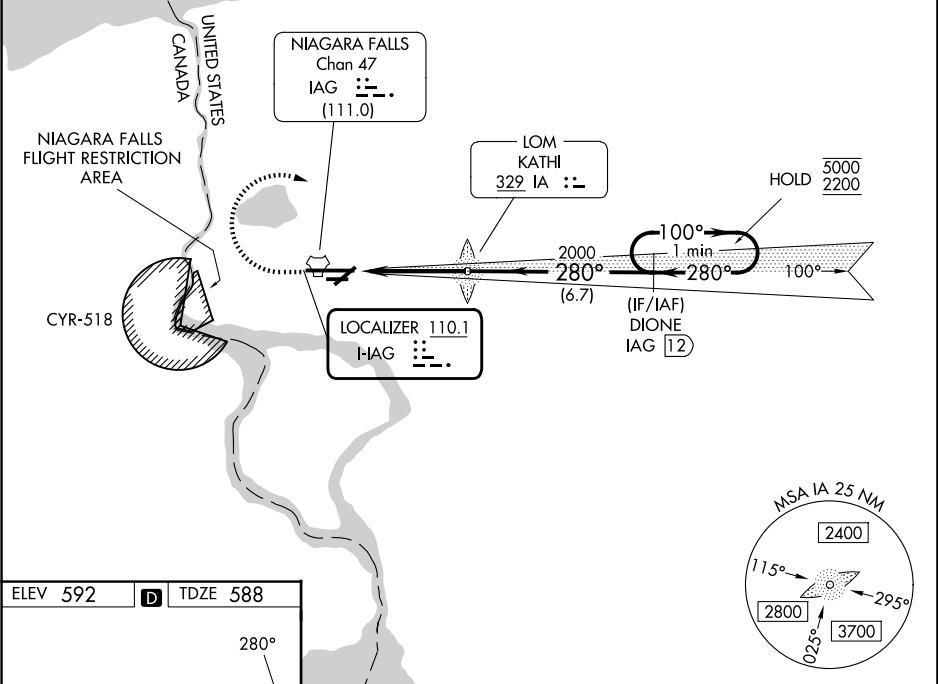

1500	3200	IA 100°	DIONE IAG 12	One Minute Holding Pattern	
hdg 150°					
1500	3200	IA LOM 1747	DIONE IAG 12	100°	5000
				280°	2200
				GS 2.50°	TCH 67
CATEGORY	A	B	C	D	E
S-ILS 28	838/40 250 (300-¾)				
S-LOC 28	1080/40	492 (500-¾)	1080/50	492 (500-1)	
CIRCLING	1100-1	508 (600-1)	1280-2 688 (700-2)	1280-2¼ 688 (700-2¼)	1280-2½ 688 (700-2½)